

Refine-POI: Reinforcement Fine-Tuned Large Language Models for Next Point-of-Interest Recommendation

Peibo Li

University of New South
Wales
Sydney, Australia
peibo.li@student.unsw.edu.au

Shuang Ao

University of New South
Wales
Sydney, Australia
shuang.ao@unsw.edu.au

Hao Xue

University of New South
Wales
Sydney, Australia
hao.xue1@unsw.edu.au

Yang Song

University of New South
Wales
Sydney, Australia
yang.song1@unsw.edu.au

Maarten de Rijke

University of Amsterdam
The Netherlands
m.derijke@uva.nl

Johan Barthélemy

Nvidia
USA
jbarthelemy@nvidia.com

Tomasz Bednarz

Nvidia
USA
tbednarz@nvidia.com

Flora D. Salim

University of New South
Wales
Sydney, Australia
flora.salim@unsw.edu.au

Abstract

Large language models (LLMs) have been adopted for next point-of-interest (POI) recommendation tasks. Typical LLM-based recommenders fall into two categories: prompt-based and supervised fine-tuning (SFT)-based models. Prompt-based models generally offer greater output flexibility but deliver lower accuracy, whereas SFT-based models achieve higher performance yet face a fundamental mismatch: next POI recommendation data does not naturally suit supervised fine-tuning. In SFT, the model is trained to reproduce the exact ground truth, but each training example provides only a single target POI, so there is no ground truth for producing a top- k list. To address this, we propose **Refine-POI**, a reinforcement fine-tuning framework for next POI recommendation. We introduce *recommendation-driven rewards* that enable LLMs to learn to generate top- k recommendation lists using only one ground-truth POI per example. Experiments on real-world datasets demonstrate that Refine-POI achieves state-of-the-art top- k recommendation performance.

CCS Concepts

• Information systems → Recommender systems.

Keywords

Large language models, Point-of-interest recommendation

ACM Reference Format:

Peibo Li, Shuang Ao, Hao Xue, Yang Song, Maarten de Rijke, Johan Barthélemy, Tomasz Bednarz, and Flora D. Salim. 2025. Refine-POI: Reinforcement Fine-Tuned Large Language Models for Next Point-of-Interest Recommendation. In *Proceedings of ACM SIGSPATIAL International Conference on Advances in Geographic Information Systems 2025 (ACM SIGSPATIAL 2025)*, November 3–6, 2025, Minneapolis, MN, USA. ACM, New York, NY, USA, 11 pages.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

ACM SIGSPATIAL 2025, Minneapolis, MN, USA
© 2025 Copyright held by the owner/author(s).

1 Introduction

Fueled by rapid advances in mobile communications and positioning technologies, location-based social networks (LBSNs) have seen explosive growth and now offer rich geographic information. One key application built on LBSN data is next point-of-interest recommendation, which uses users' past check-in trajectories to predict their next point-of-interest (POI). Unlike traditional machine learning and GNN-based methods, large language model (LLM)-based next POI recommenders have been developed due to their prior geographic and commonsense knowledge [33]. Furthermore, LLMs' natural language output makes them a perfect fit for interactive-oriented tasks.

LLM-based next POI recommenders fall into two categories: prompt-based and supervised fine-tuning (SFT)-based. Prompt-based methods directly deploy pre-trained models, and their outputs depend entirely on the prompts. Prompt-based methods [3, 5, 22] usually underperform because they lack specific knowledge of the dataset. At the same time, they preserve the pre-trained models' capabilities, enabling them to output both the recommendations and other flexible content. On the other hand, SFT-based methods [11, 13, 24] fine-tune models so that they output exactly the ground-truth labels. These methods perform better since they are trained on the data, enabling them to adapt to items not explicitly mentioned in the prompt. However, they are limited by the fact that they require ground truth for everything they are asked to output: (i) only the top-1 recommendation is provided in the dataset, while top- k recommendations are required in real-world scenarios; (ii) once an LLM is fine-tuned to do top-1 recommendation, its ability to generate general content is weakened. Ground truth generated by humans or other LLMs is often required for them to produce reasoning or explanations.

In summary, prompt-based methods retain flexibility but lack accuracy, while SFT-based methods are accurate but lose the LLM's natural-language strengths. To combine the best of both worlds, we raise the research question: **Can we fine-tune an LLM to produce a top- k recommendation list without requiring extra ground-truth labels?** Reinforcement fine-tuning (RFT) has been adopted by R1-like LLMs [7], which show strong reasoning and problem-solving ability. Unlike traditional supervised fine-tuning,

reinforcement learning (RL) can optimize the model's output beyond the strict constraints of ground truth data by using reward signals. It offers a promising direction to fine-tune LLMs while preserving their pre-trained abilities. Motivated by this, we propose Refine-POI, an RFT LLM framework for next POI recommendation. We follow standard SFT methods to transform the check-in data into text form and feed it into LLMs. Instead of optimizing the LLM with the ground truth, we apply policy gradient, computing the gradient based on a set of rule-based rewards. Because of the flexibility of the rule-based rewards, we only need to check whether the correct answer is contained in the LLM outputs, rather than forcing the LLM to output exactly the same ground truth output. Furthermore, unlike the conventional accuracy reward, where the reward signal is binary, we introduce novel recommendation-driven rewards. Specifically, our reward encourages the model to focus not only on whether it gives the correct answer, but also on the position in which the correct answer appears in the recommendation list. As a result, our model can recommend not just a single top-1 item, but full top- k lists. We also adopt a dynamic filtering technique to improve training stability and quality by filtering out samples in a batch that do not contribute to learning. In addition, we introduce location-aware trajectory prompting to activate the geographic knowledge of LLMs.

The main contributions of our work are as follows:

- (1) We propose Refine-POI, an RFT LLM framework for next POI recommendation that combines the advantages of both prompt-based and SFT-based approaches. To the best of our knowledge, this is the first work to introduce RFT-based training for next POI recommendation.
- (2) We propose recommendation-driven rewards, which utilize only one ground-truth item to optimize top- k recommendations.
- (3) We conduct extensive experiments on two real-world LBSNs datasets and show that our model achieves state-of-the-art performance on both.

2 Related Work

2.1 LLM-based Next POI Recommenders

2.1.1 Prompt-based. LLM-Mob [22] is a prompt-based framework that guides LLMs to predict users' next location and provide explanations. The authors give LLMs the trajectory of a user that is provided using the format (start time, day of week, duration, place ID) and ask the model to predict the next place ID of the target stay. They also provide instructions that guide the model to 'think.' LLM-Move [5] focuses on the geographical influence and sequential transitions of user trajectories. The task is asking the model to choose the next POI in a candidate set, which consists of the ground truth and 100 randomly selected candidates. Pre-trained LLMs are fed with long-term and recent check-ins and prompted to consider four aspects: long-term preference, current preference, distance, and the categories of the user-preferred sequential transitions. HMP-LLM [35] uses trend, seasonal, and residual time series data, which is derived from the decomposition technique. The authors guide LLMs to consider historical patterns and seasonal cycles. AgentMove [3] adopts an approach with better system design. It first encodes long-term spatial-temporal memory as user profiles and statistical patterns, and short-term memory is also reflected in

the prompt as statistical patterns. The model uses real addresses from a search engine to align LLMs with real-world knowledge. Finally, it has a location transition graph to capture shared mobility patterns. Prompt-based LLM recommenders have limited knowledge of data, as they can only access the data that appears in the prompt. Therefore, it is hard for them to recommend unseen POI.

Our method is an RFT-based model, allowing the model to memorize POI throughout the training.

2.1.2 Fine-tuning-based. LLM4POI [11] transforms the next POI recommendation task into question-answering. It applies SFT with LLMs, focusing on using the rich contextual information in POI data. NextLocLLM [13] encodes locations based on continuous spatial coordinates and incorporates natural language descriptions of POI categories. To obtain top- k recommendations, the authors apply a KD-tree to retrieve the top- k locations closest to the predicted coordinates, which are the output from the LLM. Genup [24] generates user profiles and personas as a system prompt for SFT, reducing reliance on extensive historical data and improving computational efficiency. The biggest limitation of SFT-based LLM recommenders is that the ground-truth they rely on does not contain a top- k recommendation list. As a result, they either do not output top- k recommendations or have to do so in approximate ways.

Our RFT framework is not constrained by the ground-truth by using reward signals; it can output native top- k recommendations.

2.2 Traditional Next POI Recommenders

2.2.1 Sequence-based models. Initial studies on next POI recommendation approached it as a sequential recommendation task. As a result, strategies commonly employed in other sequential recommendation areas were repurposed. For example, the next POI recommendation problem is first presented by Cheng et al. [2], who employ FMPC [15] with the addition of a constraint limiting consideration to nearby locations for each user. He et al. [8] merge the personalized Markov chain with a latent pattern, incorporating the softmax function. Nonetheless, these methods are less efficient at capturing intricate sequential patterns when compared to deep neural networks. Recent advancements have started integrating RNN-based models through the rise of deep learning. Kong and Wu [10] introduce HST-LSTM, adding spatial-temporal influences into LSTM gates for guided learning and using a hierarchical approach to capture visit sequence periodicity. LSTPM [18] uses three LSTM modules, incorporating non-local neural operations and geo-dilated LSTM for short-term preference modeling. PLSPL [25] employs an embedding layer combined with an attention mechanism to ascertain long-term preferences, and two LSTM models to characterize short-term preferences at both location and category tiers. STAN [14] uses a multimodal embedding layer for learning representations related to user, location, time, and spatial-temporal aspects, plus a bi-layer attention architecture to determine explicit spatial-temporal connections within trajectories. CFPre [32] concentrates on users' multi-step future plans, employing an attention mechanism to draw future references from past and current preferences encoded by transformer and LSTM encoders. Sequential-based models usually suffer from short trajectories and the cold-start problem.

Our approach uses LLMs with better generalization ability than traditional machine learning methods, alleviating the cold-start problem. Furthermore, the long-term memory design in our method combines historical information with the current trajectory, compensating for the limited information in short trajectories.

2.2.2 Graph-based models. Recently, graph-based approaches have been introduced to overcome the shortcomings of sequence-based models. STP-UDGAT [12] pioneers the use of a graph attention network [21], enabling selective learning from others in a global context. Zhang et al. [32] propose a hierarchical multi-task graph recurrent network (HMT-GRN) to understand user-POI as well as user-region distributions, using a GRN in place of the LSTM unit to capture both sequential and global spatio-temporal relationships between POIs. DRGN [23] explores the intrinsic properties of POIs by learning disentangled representations from both distance-based and transition-based relation graphs with a GCN layer. GETNEXT [30] tackles the cold start issue by using collaborative signals from other users, introducing a global trajectory flow map alongside a novel graph-enhanced transformer model. STHGCN [26] addresses cold-start challenges by creating a hypergraph to capture higher-order information, including user trajectories and collaborative interactions. While graph-based models address the cold-start issue, they fail to integrate contextual information with commonsense knowledge. Our approach prevents the loss of contextual information through trajectory prompting, and the LLMs we employ possess commonsense knowledge to comprehend contextual information.

2.3 Reinforcement Learning Optimized LLMs in Recommender System

There are various methods using LLMs as reward models for reinforcement learning. Here, we only show the literature that uses LLMs as a policy. LLMCRS [6] uses reinforcement learning from performance feedback on conversational recommender systems (RLPF); it uses recommendation performance and response generation performance to guide LLM learning, resulting in improved overall performance for conversational recommenders. The authors use HIT and BLEU from LLMs' generated output as rewards to guide the training, and they use the basic policy gradient. LLM2ER [29] uses an approach similar to RLHF to train LLMs to specifically explain recommendations. Instead of iteratively using human-generated data to train a reward model, the authors use a static dataset that consists of high-quality explanations.

3 Problem Definition

We aim to optimize a large language model (LLM) for the task of recommending the next point-of-interest (POI) using reinforcement learning, which is defined by the following components.

Environment. The system operates within a dynamic environment comprising users, a diverse set of POIs, and contextual factors such as time, location, and user activity history. Specifically, the data can be formalized as follows. Consider a dataset \mathcal{D} of user check-in records. Each record is represented by a tuple $q = (u, p, c, t, g)$, where:

- u denotes a user from the set $U = \{u_1, u_2, \dots, u_N\}$, where N is the total number of users;

- p is a point of interest (POI) from the set $P = \{p_1, p_2, \dots, p_M\}$, where M is the number of distinct POIs;
- c specifies the category of the POI;
- t represents the timestamp of the check-in; and
- g signifies the geographic information of the POI.

Given a time interval Δt , trajectories for a user u are formed by splitting the check-in records based on this interval. Each trajectory T_i^u up to timestamp k for user u is given by:

$$T_i^u(k) = \{(p_1, c_1, t_1, g_1), \dots, (p_k, c_k, t_k, g_k)\},$$

where $t_1 < t_2 < \dots < t_k = t$ and $t_k - t_1 \leq \Delta t$.

State (s_t). At time-step t , the state s_t indicates the current POI a user is at.

Action (a_t). The action a_t represents the recommendation made by the LLM at time t , i.e., selecting a POI for the user to visit next.

Policy (π). The policy π is a strategy employed by the LLM to select actions based on the current state, aiming to maximize the expected cumulative reward. In this paper, we use the LLM as the policy for the recommendation.

Reward (r_t). After taking action a_t at state s_t , the system receives a reward r_t that measures the quality of the recommendation.

Objective. The goal is to maximize the expected reward.

Optimization via Reinforcement Learning. To optimize the LLM-based recommendation system, we employ a reinforcement learning algorithm that updates the policy π by:

- (1) Generating candidate POI recommendations using the current LLM policy;
- (2) Evaluating the quality of these recommendations using the reward r_t ; and
- (3) Updating the model parameters to maximize the expected cumulative reward.

4 Preliminaries

Traditional reinforcement-learning methods like proximal policy optimization (PPO) [16] rely on a separate critic network to estimate the expected value of each action. In contrast, group relative policy optimization (GRPO) [17] removes the need for a standalone critic by directly comparing multiple candidate responses. Specifically, given an input question q , GRPO draws N candidate answers $\{o_1, o_2, \dots, o_N\}$ from the current policy $\pi_{\theta_{\text{old}}}$. Each sampled response o_i is scored by a reward function $R(q, o_i)$, which quantifies how well that response addresses the query.

To normalize these reward values within the group, GRPO computes both the mean and standard deviation of the set of rewards $\{r_1, r_2, \dots, r_N\}$. The normalized advantage for each candidate is then defined as:

$$A_i = \frac{r_i - \text{mean}\{r_1, r_2, \dots, r_N\}}{\text{std}\{r_1, r_2, \dots, r_N\}}. \quad (1)$$

Here, A_i indicates how much better (or worse) response o_i is compared to the other $N - 1$ samples. These advantage values are used to update the policy according to the following GRPO objective:

$$J_{\text{GRPO}}(\theta) = \mathbb{E}_{\{o_i\}_{i=1}^N \sim \pi_{\theta_{\text{old}}}(q)} \left[\frac{1}{N} \sum_{i=1}^N \left\{ \min[s_1 \cdot A_i, s_2 \cdot A_i] - \beta D_{\text{KL}}[\pi_{\theta} \parallel \pi_{\text{ref}}] \right\} \right]. \quad (2)$$

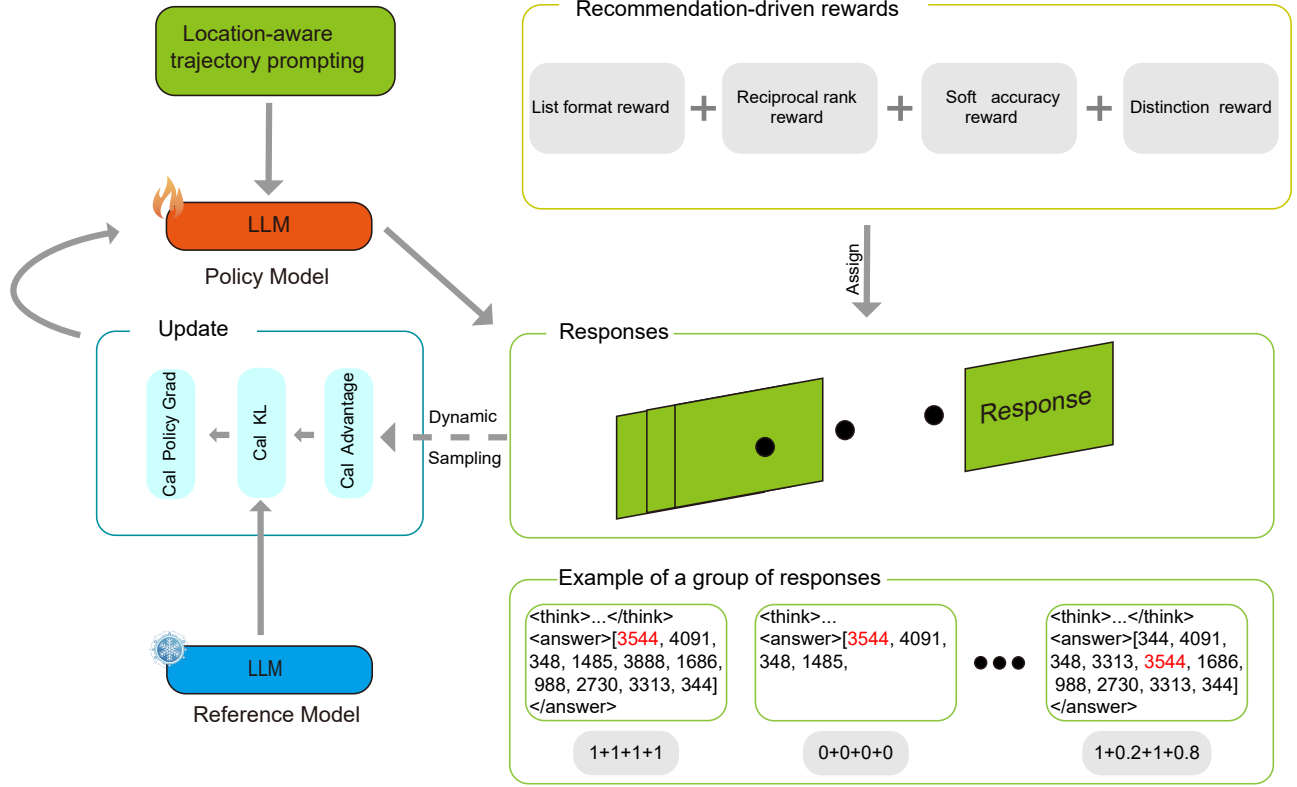


Figure 1: The Refine-POI framework. We start with location-aware trajectory prompting, where we transform check-in records into prompts and incorporate them with extra POI address information. Then we do multiple rollouts of responses for the prompt and calculate our recommendation-driven rewards for each response. For each group of rewards, we apply dynamic sampling. The sampled rewards are then used to calculate the advantages. Advantages, along with KL divergence, give us the final policy gradient to update the policy model. In the bottom-right example, the first response has the correct format, the correct item appears in the first position, and all items are distinct. Thus, the reward would be 1 (list format reward) + $\frac{1}{1}$ (reciprocal rank reward) + 1 (soft accuracy reward) + 10×0.1 (distinction reward). The second response has the wrong format, despite containing the correct item. Therefore, the reward for the second response is 0. The last response has the correct format. The correct item appears in the 5th position, and there are only eight distinct items. So the reciprocal rank reward and the distinction reward would be $\frac{1}{5}$ and 8×0.1 . Note that here we use a weight of 1 for all the rewards for clarity, which is different from the weights we used in the final model.

In this formulation, the two terms s_1 and s_2 are defined as follows:

$$s_1 = \frac{\pi_{\theta}(o_i | q)}{\pi_{\theta_{\text{old}}}(o_i | q)} \quad (3)$$

$$s_2 = \text{clip}\left(\frac{\pi_{\theta}(o_i | q)}{\pi_{\theta_{\text{old}}}(o_i | q)}, 1 + \epsilon, 1 - \epsilon\right). \quad (4)$$

Here, $D_{\text{KL}}[\pi_{\theta} \parallel \pi_{\text{ref}}]$ is a Kullback–Leibler divergence term that penalizes deviation from a reference policy, and β controls its strength. The clipping in s_2 ensures that policy updates do not move too far in a single step, analogous to PPO’s clipped objective.

5 Methodology

In this section, we introduce the methodology of Refine-POI, as shown in Figure 1, which contains the following components: (i) location-aware trajectory prompting; (ii) rule-based reward; and (iii) dynamic sampling. Location-aware trajectory prompting serves

as the base of our method and bridges the gap between raw data and LLMs. Rule-based reward is the core of the training, producing rewards based on LLMs’ outputs, which are then converted into policy gradients. Dynamic sampling helps with training stability and quality.

5.1 Location-aware Trajectory Prompting

Location-aware trajectory prompting is proposed to make check-in trajectory data compatible with LLMs. It is a combination of long-term memory, short-term memory, and location-aware POI information.

5.1.1 Long-term memory. This module extracts historical trajectories to augment the current trajectory. Specifically, given a user’s entire data D_u , we split D_u into several subsections proportional to

POI metadata (ID, name, address; 'None' = missing)
(192, 'Union Square Park', 'btwn Broadway & Union Sq E'), (932, 'Lord & Taylor', '424 5th Ave'), (1031, 'Starbucks', '240 Park Ave S'), (2920, 'Canarsie', None), (3544, 'Planet Fitness', '856 Remsen Ave'), (2297, 'MTA Subway – Canarsie/Rockaway Pkwy (L)', 'Rockaway Pkwy')
Question
What insights can you derive solely based on the addresses of these POIs?
Response
<p>1. Boroughs & neighborhoods:</p> <ul style="list-style-type: none"> - Union Square Park (btwn Broadway & Union Sq E) - Lord & Taylor (424 5th Ave) - Starbucks (240 Park Ave S) <p>All three are in Manhattan around the Union Square / Flatiron corridor.</p> <ul style="list-style-type: none"> - MTA Subway – Canarsie/Rockaway Pkwy (L) (Rockaway Pkwy) - Planet Fitness (856 Remsen Ave) - Canarsie (neighborhood - level) <p>These are all in Brooklyn's Canarsie area at the eastern end of the L train.</p> <p>2. Spatial clustering in Manhattan:</p> <ul style="list-style-type: none"> - Lord & Taylor → Union Square Park → Starbucks all lie within a 500 m radius. - Walking times: ~5–7 min from Lord & Taylor to Union Square Park; ~3 min from Park to Starbucks. - Suggests the user's "home/work anchor" is near Union Square. <p>3. Brooklyn excursion:</p> <ul style="list-style-type: none"> - After Manhattan stops, the user checks into Canarsie and then Planet Fitness (856 Remsen Ave), a few blocks west of the Rockaway Pkwy station. - The L train's Rockaway Pkwy station connects this area with Manhattan.

(a) Response by LLM with real addresses in the prompt.

Figure 2: Different responses by LLM between providing real addresses and geo coordinates in the prompt.

its length, thus roughly mimicking a monthly data update. We update the long-term memory when the incoming current trajectory reaches the next subsection, at which point a new subsection of historical trajectories is added to the existing long-term memory.

5.1.2 Short-term memory. The short-term memory indicates the latest trajectory of the user for whom we want to make a recommendation. For a trajectory $T_i^u(k)$, we use only $T_i^u(k-1)$ as short-term memory, and the last entry of $T_i^u(k)$ will be the target.

5.1.3 Location-aware POI information. Existing work on human mobility usually directly uses geo-coordinates or grid cells divided based on geo-coordinates to represent POI locations. However, they are not suitable for LLMs for several reasons. First, geo-coordinates are numerical, and they either consume too many tokens or require the LLMs to tokenize them differently, which also implies further fine-tuning. Second, although LLMs have prior knowledge of maps, their pre-trained corpora are more related to text data. Therefore, LLMs are inherently less sensitive to geo-coordinates than to specific addresses. Third, geo-coordinate-based grid cells eliminate the semantics of geo-coordinates, which is crucial for LLMs to solve problems. As shown in Figure 2, we ask LLMs to derive insights based on POI metadata. In subfigure (a), we provide real addresses of POIs, while in subfigure (b), we provide geo-coordinates. We observe that in the response to subfigure (a),

POI metadata (ID, name, Latitude, Longitude)
(192, 'Union Square Park', 40.735282, -73.990403), (932, 'Lord & Taylor', 40.751502, -73.982719), (1031, 'Starbucks', 40.737841, -73.988498), (2920, 'Canarsie', 40.643657, -73.900673), (3544, 'Planet Fitness', 40.64656, -73.913607), (2297, 'MTA Subway – Canarsie/Rockaway Pkwy (L)', 40.646099, -73.902669)
Question
What insights can you derive solely based on the addresses of these POIs?
Response
<p>1. Two compact "hubs"</p> <p>Manhattan hub: (Lord & Taylor, Union Square Park, Starbucks) - Locations: Lord & Taylor, Union Square Park, Starbucks - Centroid: arithmetic mean of the three lat/lon pairs → (40.741542 N, -73.987207 W) (computed) - Radius: max Haversine distance from that centroid to any point → ~1 170 m (computed)</p> <p>Brooklyn hub: (Canarsie neighborhood, Planet Fitness, Canarsie/Rockaway Pkwy station) - Centroid: (40.645439 N, -73.905650 W) (computed) - Radius: ~683 m (computed)</p> <p>2. Inter-hub separation</p> <ul style="list-style-type: none"> - Centroid-to-centroid Haversine distance → ~12.7 km (computed) - Bounding-box extents (all six POIs): North-south span: ~12.0 km (computed) East-west span: ~7.6 km (computed) <p>3. Relative orientation:</p> <ul style="list-style-type: none"> - The Manhattan hub is roughly NNW of the Brooklyn hub (about 50° west of due north). (computed via basic bearing formula)

(b) Response by LLM with geo coordinates in the prompt.

all contents are produced via general knowledge without external computation, whereas in subfigure (b), LLMs tend to perform external computation for geo-coordinates. This indicates that LLMs have better general knowledge of addresses and rely more on external tools for geo-coordinates instead of native perception.

We adopt the recently released FSQ-OS-Places¹ dataset, which contains the POI metadata for the Foursquare dataset. We do not use the OpenStreetMap API because we find that Foursquare anonymizes location data, and the geo-coordinates in the Foursquare dataset can be imprecise.

5.1.4 Location-aware trajectory prompt generation. To generate a prompt, we use element pairs '<history></history>' and '<current></current>' to indicate the long-term and short-term memory, respectively. Within the element pair, we describe each check-in record as a tuple (Check-in-Time, POI-ID, POI-Category). Then we add associated location-aware POI information, as well as the count of the POIs that appear in the memory after the check-in records.

5.2 Recommendation-driven Reward

There are two challenges in applying RFT to POI recommendation: First, general R1-like models focus on tasks such as mathematics and coding. Their evaluation of answers is usually binary (for instance,

¹<https://huggingface.co/datasets/foursquare/fsq-os-places>

whether the answer to a math question is correct or if the code can be executed). This differs from recommendation, where the output is often a list of items. We cannot simply evaluate whether a recommendation list is correct, because we have only one ground-truth item rather than the entire list. Second, LLMs tend to include duplicate items in their recommendation lists, especially after SFT. To address these two challenges, we propose a recommendation-driven reward, which consists of a list format reward, an reciprocal rank (RR) reward, a soft accuracy reward, and a distinct reward.

List Format Reward. Extending the conventional syntax format reward, our list format reward ensures that the recommendation list contains the desired number of items. For each completion o_i , in addition to checking the syntax format f_{syn} , we verify that the completion contains exactly k recommended items. We apply a binary reward scheme: completions with correct syntax and exactly k items receive a reward of 1; otherwise, they receive 0, as formulated below:

$$reward_F(o_i) = \begin{cases} 1, & \text{if } f_{syn} = 1 \wedge \#item = k, \\ 0, & \text{otherwise.} \end{cases} \quad (5)$$

Reciprocal Rank Reward. Since we have only a single ground-truth item rather than the full recommendation list, we can only measure whether the ground-truth item appears in the list. However, we can evaluate list quality by the rank of the ground-truth item, where rank is its position in the recommendation list. Inspired by the mean reciprocalrank (MRR) metric, which evaluates the mean reciprocal rank of the ground-truth item, we propose the RR reward. As shown in Equation 6, we follow the MRR design, assigning a reward equal to the reciprocal of the ground-truth item's rank:

$$reward_{RR}(o_i) = \begin{cases} \frac{1}{rank_i}, & \text{if } GT_i \in o_i \wedge reward_F(o_i) = 1, \\ 0, & \text{otherwise.} \end{cases} \quad (6)$$

Soft Accuracy Reward. At the beginning of training, the RR reward may not work because the model is still learning the format. Therefore, we introduce a soft accuracy reward that is more tolerant of format errors. As described in Equation 7, a reward of 1 is assigned if the ground-truth item is in the answer and the completion has correct syntax; otherwise, the reward is 0:

$$reward_{soft}(o_i) = \begin{cases} 1, & \text{if } GT_i \in o_i \wedge f_{syn} = 1, \\ 0, & \text{otherwise.} \end{cases} \quad (7)$$

Distinction Reward. To encourage the model to recommend diverse items, we design the distinction reward, which measures the number of distinct items in the recommendation list. It is formulated as follows:

$$reward_{dis}(o_i) = \begin{cases} |\{item_i\}|, & \text{if } reward_F(o_i) = 1, \\ 0, & \text{otherwise.} \end{cases} \quad (8)$$

The overall reward for each completion o_i is the weighted sum of the four rewards:

$$reward = w_1 \cdot reward_F + w_2 \cdot reward_{RR} + w_3 \cdot reward_{soft} + w_4 \cdot reward_{dis}, \quad (9)$$

where w_i is the corresponding weight.

5.3 Dynamic Sampling

An empirical observation during our RFT training is that there are often groups of responses with the same reward. For example, the LLM might output eight completions for a difficult data point, and the entire group of completions can be incorrect. In such training steps, the policy gradient is zero, which introduces noise into training. DAPO [31] introduces the dynamic sampling technique, where data for which all completions have accuracy 0 or 1 is filtered out. Because the core measurement of accuracy in our framework is the RR reward, we filter out data that causes the group of completions to have the same RR reward.

6 Experiment

6.1 Experimental Setup

6.1.1 Dataset. We conduct experiments on two public datasets: Foursquare-NYC, Foursquare-TKY [28]. The two datasets, collected over 11 months, comprise data from New York City and Tokyo, sourced from Foursquare. We use data that has been preprocessed as per the methods detailed by Yan et al. [26]. The data is preprocessed as follows: (i) Filter out Points of Interest (POIs) with fewer than 10 visit records in history; (ii) Exclude users with fewer than 10 visit records in history; (iii) Divide user check-in records into several trajectories with 24-hour intervals, excluding trajectories that contain only one check-in record. The check-in records are also sorted chronologically: the first 80% are used for the training set, the middle 10% are defined as the validation set, and the last 10% are defined as the test set. Note that the validation and test set has to contain all users and POIs that appear in the training set. The unseen users and POIs would be removed from the validation and test set.

6.1.2 Baselines. We compare our model with the following baselines:

- FPMC [15]: Rooted in the Bayesian Personalized Ranking framework, it employs a typical Markov chain combined with matrix factorization to predict location transitions effectively.
- LSTM [9]: A variant of RNN, is designed for processing sequential data. Unlike standard RNNs, LSTMs are capable of capturing both short-term and long-term dependencies in sequential patterns, making them more effective for a range of sequential data tasks.
- PRME [4]: Using a pairwise ranking metric embedding, this personalized ranking model effectively learns sequential transitions of POIs along with capturing user-POI preferences in latent space.
- STGCN [34]: Based on LSTMs, this model incorporates gating mechanisms to effectively model temporal and spatial intervals in check-in sequences, thereby capturing both short-term and long-term user preferences.
- PLSPL [25]: This recurrent model employs an attention mechanism to learn short-term preferences and two parallel LSTM structures for long-term preferences, integrating both through a user-specific linear combination.
- STAN [14]: Using a bi-layer attention architecture, STAN aggregates spatio-temporal correlations within user trajectories, learning patterns across both adjacent and non-adjacent locations as well as continuous and non-continuous visits.

Table 1: Comparison of methods on the NYC and TKY datasets.

Method	NYC				TKY			
	Acc@1	Acc@5	Acc@10	MRR	Acc@1	Acc@5	Acc@10	MRR
FPMC	0.1003	0.2126	0.2970	0.1701	0.0814	0.2045	0.2746	0.1344
LSTM	0.1305	0.2719	0.3283	0.1857	0.1335	0.2728	0.3277	0.1834
PRME	0.1159	0.2236	0.3105	0.1712	0.1052	0.2278	0.2944	0.1786
STGCN	0.1799	0.3425	0.4279	0.2788	0.1716	0.3453	0.3927	0.2504
PLSPL	0.1917	0.3678	0.4523	0.2806	0.1889	0.3523	0.4150	0.2542
STAN	0.2231	0.4582	0.5734	0.3253	0.1963	0.3798	0.4464	0.2852
GETNext	0.2435	0.5089	0.6143	0.3621	0.2254	0.4417	0.5287	0.3262
STHGCN	0.2734	<u>0.5361</u>	<u>0.6244</u>	<u>0.3915</u>	0.2950	0.5207	0.5980	<u>0.3986</u>
LLM-Mob	0.2343	0.5066	0.5660	0.3502	0.1545	0.3837	0.4451	0.2519
LLMMove	0.1525	0.4429	0.5080	0.2690	0.1293	0.3601	0.4154	0.2248
LLM4POI	<u>0.3372</u>	–	–	–	<u>0.3035</u>	–	–	–
Refine-POI	0.3469	0.5984	0.6627	0.4520	0.3160	<u>0.5140</u>	<u>0.5830</u>	0.4020
Improvement (%)	2.88%	11.62%	6.13%	15.46%	4.12%	–	–	0.85%

- GETNext [30]: A transformer-based approach, GETNext uses a global trajectory flow map that is user-agnostic to enhance next-POI predictions, alongside proposing a GCN model for generating effective POI embeddings.
- STHGCN [26]: Constructing a hypergraph to capture inter and intra-user relations, STHGCN proposes a hypergraph transformer and solves the cold-start problem.
- LLM-Mob [22]: A prompt-based LLM POI recommender that incorporates long-term and short-term dependencies of mobility data, considering temporal information.
- LLMMove [5]: LLMMove extracts user preference and geo distance into the prompt.
- LLM4POI [11]: A SFT based LLM POI recommender that transforms the next POI recommendation task into question-answering.

6.1.3 Evaluation metrics. We use ACC@ k and MRR as our evaluation metrics, which are widely used in the next POI recommendation task. ACC@ k looks at what proportion of the test items would have been retrieved with the top- k recommended list and can be formalized as:

$$\text{Acc}@k = \frac{1}{m} \sum_{i=1}^m \mathbb{1}(\text{rank} \leq k), \quad (10)$$

where $\mathbb{1}$ is the indicator function. Rank is the rank of the order of the correct prediction in the recommendation list. A larger value represents better performance. MRR@ k not only looks at the presence of the test item but also its rank in the recommended list. MRR@ k can be defined as:

$$\text{MRR}@k = \frac{1}{m} \sum_i \frac{1}{\text{rank}_i}. \quad (11)$$

6.1.4 Implementation details. For the prompt-based LLM recommenders, we use Gemini-2.0-flash-lite [19] as the base model. For the fine-tuned-based LLM recommenders, we use Qwen2.5-7b [20, 27] as the base model. We use a learning rate of $5e^{-5}$ for the SFT models and a learning rate of $1e^{-6}$ for Refine-POI. We use weights of 1, 2, 0.5, and 1 for the format reward, reciprocal rank reward, soft accuracy reward, and distinction reward, respectively. We run

three epochs for the SFT models and one epoch for Refine-POI. Our experiments are run on a server with 8 Nvidia A100 GPUs.

6.2 Main Results

We compare Refine-POI with the baselines on the two datasets, as shown in Table 1. We observe that Refine-POI outperforms all baselines in NYC across all evaluation metrics. Specifically, we achieve improvements of 2.88%, 11.62%, 6.13%, and 15.46% in Acc@1, Acc@5, Acc@10, and MRR, respectively. We also obtain the best performance in TKY for Acc@1 and MRR. The performance drop from NYC to TKY can be attributed to a larger search space, as TKY has more POIs and users. Compared to previous SFT-based models, Refine-POI can output top- k recommendations while maintaining competitive performance, demonstrating the effectiveness of our RFT framework.

6.3 Analysis and Discussions

6.3.1 Reasoning. A significant breakthrough of R1-like models is their reasoning ability, which is believed to be attributed to the power of RFT and outcome-based rule-based rewards. Since Refine-POI is also an RFT framework, we would naturally expect the model to show reasoning ability for the next POI recommendation task. However, the version of Refine-POI in this paper does not demonstrate reasoning ability. On the contrary, it prefers not to provide its thinking process and instead shows the answer directly. In this section, we discuss Refine-POI and two variants of it as a taste of making reasoning models for the next POI recommendation task. For convenience, we refer to the first variant as Refine-POI-len, in which we add a length reward to the recommendation-driven rewards. We refer to the second variant as Refine-POI-guide. In this variant, we further add instructions in the prompt to guide the model’s reasoning. Specifically, in the prompt, we add the following instructions: “1. Work/School Routines: Determine if the user has regular work or school routines. Analyze these routines separately for weekdays and weekends. 2. Main Activity Area: Identify the primary geographical area(s) where the user spends most of their

Table 2: An example of Refine-POI and its two variants giving recommendations.

Ground truth:	3544
Target time:	2013-01-10 10:54:51
Refine-POI	think: 1. Identify common patterns. 2. Identify common time intervals. 3. Identify common POI visits. 4. Identify any geographical patterns. 5. Identify any dependencies between POI visits. 6. Identify any seasonality in visits. 7. Identify any specific POI IDs visited close to the time of interest. answer: [3544, 2297, 931, 192, 4091, 988, 1485, 348, 995, 457]
Refine-POI-len	think: Reasoning about the user’s historical and current behavior patterns involves considering long-term routines alongside short-term trends. Historically, the individual predominantly engages in structured activities like educational ventures, work commutes, and fitness routines centered around New York City’s landmarks and institutions. Despite consistent daily schedules reflecting work commitments and leisure activities, recent behaviors exhibit slight variations indicating some flexibility while maintaining core structures. Current trajectory demonstrates reliability adhering to previously defined patterns while occasionally deviating slightly but consistently returning to regular activities. This user values organized locales such as workspaces, educational hubs, and exercise centers contributing to productivity and well-being. Additionally, there is a notable flexibility within their daily patterns, likely driven by personal interests combined with professional responsibilities. answer: [3544, 2297, 1686, 988, 4091, 1503, 2730, 939, 2695, 798]
Refine-POI-guide	think: 1. Work/School Routines: The user has visited multiple POI categories like Gym / Fitness Center and Department Store but no specific indication of regular work or school visits. However, the visits to public transportation stations like Subway suggest commuting but no constant regular entry points indicating irregular work/school schedules. 2. Main Activity Area: Most visits are around Gym / Fitness Center and Retail stores indicating the user spends time both casually and perhaps regularly. This suggests visits near these areas but does not specify constant residence implying variable visits around these places but no fixed home location nearby systematically mentioned. 3. Casual/Leisure Routines: Casual and leisure activities include visits to the gym suggesting casual health practices but no specific regular casual or leisure schedules indicated. 4. Secondary Activities: Not sufficient information to deduce secondary activities within work/school beyond casual health practices. 5. Time-Based Routines: Regular visits to gym on random days suggest casual engagements rather than regular schedule adherence. answer: [3544, 4091, 348, 1485, 3888, 1686, 988, 2730, 3313, 344]

time. Use the addresses of the POIs to map out these areas. 3. Casual/Leisure Routines: Identify any regular, casual, or leisure activities outside of work/school routines. Note the frequency and timing of these activities. 4. Secondary Activities within Work/School Routine: Determine if the user engages in secondary activities during their work/school routine (e.g., gym visits, coffee shops). Describe how these activities fit into their daily schedule. 5. Time-Based Routine Description: Offer a detailed description of the user’s routines, highlighting specific times for different activities. Emphasize any patterns or regularities observed over time.”, which is inspired by the traditional activity-based model [1]. Additionally, we add a think reward, which rewards the appearance of every segment from the instructions.

Table 2 shows an example where all three variants make the correct recommendation. We can see that, although Refine-POI gives the correct answer, the thinking process contains no information. We believe this phenomenon indicates potential reward hacking. After adding the length reward, Refine-POI-len provides a more extended response. In that response, the model summarizes the user’s historical behavior patterns and the recent trend of maintaining regular activities. Refine-POI-guide strictly follows the instructions and provides a structured response. Both Refine-POI-len and Refine-POI-guide generate thinking processes that reflect the input data to

some extent. However, the responses resemble descriptions rather than a thinking process that gradually leads to the answer.

Furthermore, we investigate the performance of the three variants, as shown in Table 3. We observe a performance drop for the two variants compared to Refine-POI, especially in Acc@1. A major reason may be reward hacking. As we add more rewards that are directly related to problem solving, the model might find an easy way to obtain rewards without actually providing the correct answer. We also observe a gap between Refine-POI-len and Refine-POI-guide—where the latter has instructions and a thinking reward. This might indicate potential harm in providing unverified human instructions during RFT training.

Overall, we do not obtain the desired reasoning model that we expected to perform as well as models in math and coding tasks, which indicates (i) an important difference with these tasks and (ii) that further design is required. Creating a reasoning model for the next POI recommendation task is beyond the scope of this paper and can be a direction for future work.

6.3.2 User cold-start analysis. The cold-start problem poses a challenge for next POI recommendation. Learning mobility patterns from users with little historical data is more difficult than from very active users. LLMs have strong generalization ability, and our

Table 3: Comparison of Refine-POI and its two variants on the NYC dataset.

Method	NYC			
	Acc@1	Acc@5	Acc@10	MRR
Refine-POI	0.3469	0.5984	0.6627	0.4520
Refine-POI-len	0.3084	0.5730	0.6572	0.4208
Refine-POI-guide	0.2396	0.5438	0.6417	0.3664

location-aware trajectory prompt generation design incorporates users’ trajectories with POI locations, which may help LLMs learn generalized mobility patterns. To evaluate our method’s effectiveness with inactive users, we categorize users into inactive, normal, and very active groups based on the number of trajectories in the training set, designating the top 30% as very active and the bottom 30% as inactive.

We compare Refine-POI with STHGCN and LLM4POI, both of which are designed to address the cold-start problem and perform well on inactive users. As shown in Table 4, Refine-POI achieves the best performance for inactive users in NYC, while it is less competitive in TKY. Compared to LLM4POI, an SFT-based model, Refine-POI has lower Acc@1 in TKY. Overall, this comparison demonstrates the effectiveness of Refine-POI for inactive users. The major factor behind the performance difference between NYC and TKY may be the amount of data: TKY has much more data than NYC, so shared patterns among users become more critical. This suggests a potential design improvement for Refine-POI.

Table 4: User cold-start analysis on the NYC and TKY datasets.

User groups	Model	NYC		TKY	
		Acc@1	MRR	Acc@1	MRR
Inactive	STHGCN	0.1460	0.2247	0.2164	0.3053
Normal	STHGCN	0.3050	0.4265	0.2659	0.3596
Very active	STHGCN	0.3085	0.4402	0.3464	0.4618
Inactive	LLM4POI	0.2500	–	0.2930	–
Normal	LLM4POI	0.3689	–	0.3014	–
Very active	LLM4POI	0.3711	–	0.3011	–
Inactive	Refine-POI	0.2627	0.3539	0.2408	0.3172
Normal	Refine-POI	0.3628	0.4558	0.2788	0.3575
Very active	Refine-POI	0.3786	0.4923	0.3613	0.4625

6.3.3 Trajectory length analysis. The various lengths of trajectories in next POI recommendation indicate different user behaviors, posing another challenge. Short trajectories usually contain only one or two check-in records, where spatial-temporal information is limited and behavior patterns are less pronounced. Despite the rich information in long trajectories, extracting useful insight from redundant data is also challenging. To study Refine-POI’s effects across trajectory lengths, we categorized the trajectories into short, middle, and long. Specifically, we rank the lengths of trajectories in the test set, defining the top 30% as long trajectories and the bottom 30% as short trajectories, with the rest classified as middle trajectories.

We use STHGCN and LLM4POI as baselines. Table 5 shows that Refine-POI outperforms the baselines for both short and long trajectories. We achieve improvements of 5.51% for short trajectories

and 5.7% for long trajectories in top-1 accuracy over LLM4POI in NYC. In TKY, we improve top-1 accuracy for long trajectories by 8.1% over LLM4POI. Overall, Refine-POI is effective for both short and long trajectories. Moreover, its significant advantage for long trajectories indicates its strong ability to distill insights from rich data.

Table 5: Trajectory Length analysis on the NYC and TKY datasets.

User groups	Model	NYC		TKY	
		Acc@1	MRR	Acc@1	MRR
Short	STHGCN	0.2407	0.3570	0.1921	0.2914
Middle	STHGCN	0.2524	0.3732	0.2060	0.3215
Long	STHGCN	0.2419	0.3695	0.2428	0.3650
Short	LLM4POI	0.3157	–	0.2877	–
Middle	LLM4POI	0.3420	–	0.3013	–
Long	LLM4POI	0.3756	–	0.3084	–
Short	Refine-POI	0.3341	0.4295	0.2872	0.3665
Middle	Refine-POI	0.3247	0.4265	0.3024	0.3865
Long	Refine-POI	0.3986	0.5109	0.3357	0.4391

6.3.4 Efficiency analysis. We report the training efficiency of our proposed Refine-POI. We compare the training time and memory usage of full-parameter training for LLM4POI and Refine-POI in Table 6. Overall, Refine-POI uses more memory and takes more time to train per epoch. This is due to the nature of RFT, where we need to generate multiple outputs for each input to compute the group advantage. Although it takes more time per epoch, Refine-POI achieves its performance in only one epoch, whereas LLM4POI requires three epochs of training. This demonstrates the strong learning efficiency of Refine-POI.

Table 6: Training time and memory usage of LLM4POI and Refine-POI using 8 A100 GPUs on the NYC dataset.

Model	Time per epoch	Overall time	Memory
LLM4POI	3.1 h/epoch	10.3 h	512 GB
Refine-POI	4.5 h/epoch	4.5 h	632 GB

6.4 Ablation Study

We consider the effectiveness of Refine-POI as a result of the joint effects of (i) recommendation-driven reward and (ii) location-aware POI information.

To investigate the contribution of each module, we design two variants of Refine-POI: Refine-POI w/o reward and Refine-POI w/o location. For Refine-POI w/o reward, we replace the reciprocal rank reward with the conventional accuracy reward, which only evaluates whether the correct item appears in the answer. For Refine-POI w/o location, we remove the location-aware POI information from the prompts. We conducted the experiment in NYC. The results are shown in Table 7. We observe that without the reciprocal rank reward, Acc@1 decreases by 33.6%, indicating that the reciprocal rank reward mainly contributes to Acc@1. On the other hand, performance drops across all three evaluation metrics without location-aware POI information, suggesting that location-aware POI information affects overall performance.

Table 7: Ablation study on the NYC dataset.

Model	NYC			
	Acc@1	Acc@5	Acc@10	MRR
Refine-POI	0.3469	0.5984	0.6627	0.4520
Refine-POI w/o reward	0.2300	0.5980	0.6630	0.4520
Refine-POI w/o location	0.3180	0.5680	0.6390	0.4250

7 Conclusion

In this paper, we propose Refine-POI, an RFT framework for next POI recommendations, which is the first to use RFT for this task. We develop location-aware trajectory prompting to use the rich geographic knowledge of LLMs. We introduce the recommendation-driven reward to optimize top- k recommendations using only one ground-truth item.

Our extensive experiments on two real-world datasets show that we achieve state-of-the-art performance in making top- k recommendations. Our analysis supports that our model can handle the cold-start problem and various trajectory lengths effectively. We also discuss our attempts at making reasoning models for the next POI recommendation task, where our findings provide visionary ideas for future work. Our ablation study shows the contribution of each module in our framework.

8 Limitations

Here, we discuss the limitations of this work and possible future directions.

Training Efficiency. Because of the nature of RFT training, our framework is limited by training efficiency. This poses a challenge for large-scale deployment in real-world scenarios. However, we believe that with advancements in parameter-efficient training and the development of scalable LLMs, the hardware requirements and efficiency of RFT training can be improved.

Reasoning. Our design for reasoning models suffers from the reward-hacking problem. Future directions for improving our design could include introducing human instructions with thorough studies and justifications, and incorporating SFT to enhance the model’s ability to reason about human mobility tasks.

Acknowledgements. This research was conducted by the ARC Centre of Excellence for Automated Decision-Making and Society (CE200100005), and funded by the Australian Government through the Australian Research Council. Additionally, we express our gratitude to the NVIDIA Academic Grant Program for providing access to an A100 GPU on Saturn Cloud. Maarten de Rijke was partially supported by the Dutch Research Council (NWO), under project numbers 024.004.022, NWA.1389.20.183, KICH3.LTP.20.006, and the European Union’s Horizon Europe program under grant agreement No. 101070212.

All content represents the opinion of the authors, which is not necessarily shared or endorsed by their respective employers and/or sponsors.

References

- [1] John L Bowman and Moshe E Ben-Akiva. 2001. Activity-based disaggregate travel demand model system with activity schedules. *Transportation research part a: policy and practice* 35, 1 (2001), 1–28.
- [2] Chen Cheng, Haiqin Yang, Michael R. Lyu, and Irwin King. 2013. Where You Like to Go Next: Successive Point-of-Interest Recommendation. In *IJCAI 2013, Proceedings of the 23rd International Joint Conference on Artificial Intelligence, Beijing, China, August 3–9, 2013*, Francesca Rossi (Ed.). IJCAI/AAAI, 2605–2611.
- [3] Jie Feng, Yuwei Du, Jie Zhao, and Yong Li. 2024. AgentMove: Predicting Human Mobility Anywhere Using Large Language Model based Agentic Framework. arXiv:2408.13986 [cs.LG] <https://arxiv.org/abs/2408.13986>
- [4] Shanshan Feng, Xutao Li, Yifeng Zeng, Gao Cong, and Yeow Meng Chee. 2015. Personalized Ranking Metric Embedding for Next New POI Recommendation. In *IJCAI’15 Proceedings of the 24th International Conference on Artificial Intelligence*. ACM, 2069–2075.
- [5] Shanshan Feng, Haoming Lyu, Fan Li, Zhu Sun, and Caishun Chen. 2024. Where to Move Next: Zero-shot Generalization of LLMs for Next POI Recommendation. In *2024 IEEE Conference on Artificial Intelligence (CAI)*. 1530–1535. <https://doi.org/10.1109/CAI59869.2024.00277>
- [6] Yue Feng, Shuchang Liu, Zhenghai Xue, Qingpeng Cai, Lantao Hu, Peng Jiang, Kun Gai, and Fei Sun. 2023. A large language model enhanced conversational recommender system. *arXiv preprint arXiv:2308.06212* (2023).
- [7] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948* (2025).
- [8] Jing He, Xin Li, Lejian Liao, Dandan Song, and William Cheung. 2016. Inferring a Personalized Next Point-of-interest Recommendation Model with Latent Behavior Patterns. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 30. Issue: 1.
- [9] Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long Short-term Memory. *Neural Computation* 9, 8 (1997), 1735–1780.
- [10] Dejiang Kong and Fei Wu. 2018. HST-LSTM: A Hierarchical Spatial-Temporal Long-short Term Memory Network for Location Prediction.. In *IJCAI*, Vol. 18. 2341–2347. Issue: 7.
- [11] Peibo Li, Maarten de Rijke, Hao Xue, Shuang Ao, Yang Song, and Flora D Salim. 2024. Large language models for next point-of-interest recommendation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1463–1472.
- [12] Nicholas Lim, Bryan Hooi, See-Kiong Ng, Xueou Wang, Yong Liang Goh, Renrong Weng, and Jagannadan Varadarajan. 2020. STP-UDGAT: Spatial-Temporal-Preference User Dimensional Graph Attention Network for Next POI Recommendation. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*. 845–854.
- [13] Shuai Liu, Ning Cao, Yile Chen, Yue Jiang, and Gao Cong. 2024. nextlocilm: next location prediction using LLMs. *arXiv preprint arXiv:2410.09129* (2024).
- [14] Yingtao Luo, Qiang Liu, and Zhaocheng Liu. 2021. Stan: Spatio-Temporal Attention Network for Next Location Recommendation. In *Proceedings of the web conference 2021*. 2177–2185.
- [15] Steffen Rendle, Christoph Freudenthaler, and Lars Schmidt-Thieme. 2010. Factorizing Personalized Markov Chains for Next-basket Recommendation. In *Proceedings of the 19th international conference on World wide web*. 811–820.
- [16] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347* (2017).
- [17] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Y Wu, et al. 2024. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300* (2024).
- [18] Ke Sun, Tiejun Qian, Tong Chen, Yile Liang, Quoc Viet Hung Nguyen, and Hongzhi Yin. 2020. Where to Go Next: Modeling Long- and Short-term User Preferences for Point-of-interest Recommendation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 34. 214–221. Issue: 01.
- [19] Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. 2023. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805* (2023).
- [20] Qwen Team. 2025. Qwen2.5-1M: Deploy Your Own Qwen with Context Length up to 1M Tokens. <https://qwenlm.github.io/blog/qwen2.5-1m/>
- [21] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. 2018. Graph Attention Networks. In *International Conference on Learning Representations*.
- [22] Xinglei Wang, Meng Fang, Zichao Zeng, and Tao Cheng. 2023. Where would i go next? large language models as human mobility predictors. *arXiv preprint arXiv:2308.15197* (2023).
- [23] Zhaobo Wang, Yanmin Zhu, Haobing Liu, and Chunyang Wang. 2022. Learning Graph-based Disentangled Representations for Next POI Recommendation. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1154–1163.
- [24] Wilson Wongso, Hao Xue, and Flora D Salim. 2024. GenUP: Generative User Profilers as In-Context Learners for Next POI Recommender Systems. *arXiv preprint arXiv:2410.20643* (2024).

- [25] Yuxia Wu, Ke Li, Guoshuai Zhao, and Xueming Qian. 2020. Personalized Long- and Short-term Preference Learning for Next POI Recommendation. *IEEE Transactions on Knowledge and Data Engineering* 34, 4 (2020), 1944–1957.
- [26] Xiaodong Yan, Tengwei Song, Yifeng Jiao, Jianshan He, Jiaotuan Wang, Ruopeng Li, and Wei Chu. 2023. Spatio-Temporal Hypergraph Learning for Next POI Recommendation. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 403–412.
- [27] An Yang, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoyan Huang, Jiandong Jiang, Jianhong Tu, Jianwei Zhang, Jingren Zhou, Junyang Lin, Kai Dang, Kexin Yang, Le Yu, Mei Li, Minmin Sun, Qin Zhu, Rui Men, Tao He, Weijia Xu, Wenbiao Yin, Wenyuan Yu, Xiafei Qiu, Xingzhang Ren, Xinlong Yang, Yong Li, Zhiying Xu, and Zipeng Zhang. 2025. Qwen2.5-1M Technical Report. *arXiv preprint arXiv:2501.15383* (2025).
- [28] Dingqi Yang, Daqing Zhang, Vincent W Zheng, and Zhiyong Yu. 2014. Modeling User Activity Preference by Leveraging User Spatial Temporal Characteristics in LBSNs. *IEEE Transactions on Systems, Man, and Cybernetics: Systems* 45, 1 (2014), 129–142.
- [29] Mengyuan Yang, Mengying Zhu, Yan Wang, Linxun Chen, Yilei Zhao, Xiuyuan Wang, Bing Han, Xiaolin Zheng, and Jianwei Yin. 2024. Fine-tuning large language model based explainable recommendation with explainable quality reward. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 38. 9250–9259.
- [30] Song Yang, Jiamou Liu, and Kaiqi Zhao. 2022. GETNext: Trajectory Flow Map Enhanced Transformer for Next POI Recommendation. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*. 1144–1153.
- [31] Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, et al. 2025. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476* (2025).
- [32] Lu Zhang, Zhu Sun, Ziqing Wu, Jie Zhang, Yew Soon Ong, and Xinghua Qu. 2022. Next Point-of-interest Recommendation with Inferring Multi-step Future Preferences. In *Proceedings of the 31st International Joint Conference on Artificial Intelligence (IJCAI)*. 3751–3757.
- [33] Qianru Zhang, Peng Yang, Junliang Yu, Haixin Wang, Xingwei He, Siu-Ming Yiu, and Hongzhi Yin. 2025. A survey on point-of-interest recommendation: Models, architectures, and security. *IEEE Transactions on Knowledge and Data Engineering* (2025).
- [34] Pengpeng Zhao, Anjing Luo, Yanchi Liu, Jiajie Xu, Zhixu Li, Fuzhen Zhuang, Victor S Sheng, and Xiaofang Zhou. 2020. Where to Go Next: A Spatio-Temporal Gated Network for Next POI Recommendation. *IEEE Transactions on Knowledge and Data Engineering* 34, 5 (2020), 2512–2524.
- [35] Xiaofeng Zhong, Yinfeng Xiang, Fang Yi, Chao Li, and Qinmin Yang. 2024. HMP-LLM: Human Mobility Prediction Based on Pre-trained Large Language Models. In *2024 IEEE 4th International Conference on Digital Twins and Parallel Intelligence (DTPPI)*. IEEE, 687–692.