

Group Membership Bias

Ali Vardasbi

University of Amsterdam
Amsterdam, The Netherlands
a.vardasbi@uva.nl

Fernando Diaz

Google
Montréal, Canada
diazf@acm.org

Maarten de Rijke

University of Amsterdam
Amsterdam, The Netherlands
m.derijke@uva.nl

Mostafa Dehghani

Google Brain
Amsterdam, The Netherlands
dehghani@google.com

ABSTRACT

When learning to rank from user interactions, search and recommendation systems must address biases in user behavior to provide a high-quality ranking. One type of bias that has recently been studied in the ranking literature is when sensitive attributes, such as gender, have an impact on a user's judgment about an item's utility. For example, in a search for an expertise area, some users may be biased towards clicking on male candidates over female candidates. We call this type of bias *group membership bias* or group bias for short.

Increasingly, we seek rankings that not only have high utility but are also fair to individuals and sensitive groups. Merit-based fairness measures rely on the estimated merit or utility of the items. With group bias, the utility of the sensitive groups is under-estimated, hence, without correcting for this bias, a supposedly fair ranking is not truly fair. In this paper, first, we analyze the impact of group bias on ranking quality as well as two well-known merit-based fairness metrics and show that group bias can hurt both ranking and fairness. Then, we provide a correction method for group bias that is based on the assumption that the utility score of items in different groups comes from the same distribution. This assumption has two potential issues of sparsity and equality-instead-of-equity, which we use an amortized approach to solve. We show that our correction method can consistently compensate for the negative impact of group bias on ranking quality and fairness metrics.

CCS CONCEPTS

• Information systems → Learning to rank.

KEYWORDS

Ranking fairness, Unbiased learning to rank

ACM Reference Format:

Ali Vardasbi, Maarten de Rijke, Fernando Diaz, and Mostafa Dehghani.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
Conference'17, July 2017, Washington, DC, USA

© 2023 Association for Computing Machinery.
ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00
<https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

2023. Group Membership Bias. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 12 pages. <https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

1 INTRODUCTION

Modern online search and recommender systems leverage user interaction data to enhance their ranking quality. When using human interactions, however, we need to account for human bias and the possibility of learning unfair ranking policies. In the context of learning to rank (LTR), the term *bias* usually refers to unequal treatment of items with equal utility by users [18]. For example, position bias occurs when items at the top of a ranked list receive more clicks than those relevant lower down: higher items in a list absorb more *exposure*. Studies show that such a bias, if left uncorrected, degrades the ranking quality of a system trained on the user interactions [2, 19, 48, 51]. As a result, a system should return rankings that strive to a certain extent for fairness of exposure. There are different definitions for fairness of exposure in ranking, leading to different metrics [11, 40, 43, 52], however, the core idea is the same: items with similar levels of utility should receive similar exposures by the system. Studies show that without meeting fairness of exposure, bias towards the privileged groups or individuals is reinforced, both in what the system learns from the ongoing interactions [14, 16], and in users' judgments about the utility of items [22, 45].

Group bias. The system can only ensure that items with similar utility receive comparable exposure to users, by arranging them accordingly. However, this alone is insufficient. Studies show that users' judgments about the utility of items are affected by their perception of the item's group membership [22, 25, 45]. This means that, even when the exposure of two high-utility items from two different groups is the same, the users may judge them differently and one group may receive more clicks than the other. We refer to this behavior as *group membership bias* or *group bias* for short. Our study focuses on the scenario of two groups, where the term "affected" refers to the group whose items are prone to underestimation and receive fewer clicks than they ideally should. Group bias is closely related to the concept of implicit bias, defined as unconscious and unintentional preference of individuals based on their membership in particular groups [23]. Implicit bias is a special case of group bias, as group bias includes intentional biases towards particular groups as well.

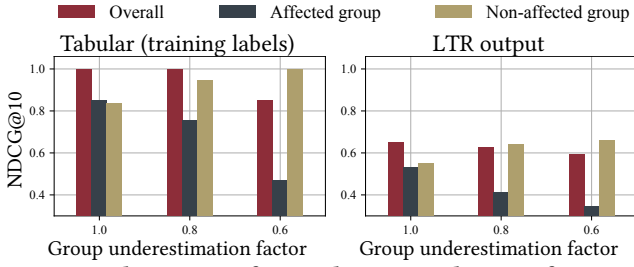


Figure 1: The impact of group bias on ranking performance for the Yahoo! dataset.

Theoretical and experimental analysis. We analyze the impact of group bias on ranking quality and merit-based fairness of exposure metrics. We consider clicks as the primary measure of user interactions, which are used in two ways: (i) For head queries, clicks are memorized and the ranking is performed via tabular search. In this case, the training labels are directly used to generate the ranking presented to the user, and user preferences can often be obtained with high accuracy [36]. (ii) For tail queries the clicks are used as supervision signals to train an LTR model. In this case, the outputs of the LTR model are used to generate the ranking that is shown to the user. With that in mind, we provide a theoretical analysis of the impact of group bias on various metrics over the training labels. This gives us an understanding of the impact of group bias on the head queries directly, and on the tail queries indirectly. Theoretically analyzing the output of a LTR model involves considering the architecture and loss function of the LTR model, which is beyond the scope of this paper. For the experimental part, however, we analyze the impact of group bias both on the training labels as well as the outputs of an LTR model.

Impact on ranking. Previous work on implicit bias [8, 23] has shown that similar to other types of bias, implicit bias can degrade the ranking quality of systems. In this work, we add to their theoretical results by quantifying this degradation with an approximation formula for the normalized discounted cumulative gain (NDCG) metric. Furthermore, we provide an important part that is missing in previous work, i.e., an experimental analysis of the impact of group bias on the outputs of an LTR model. Fig. 1 shows an example of the impact of group bias on the ranking performance, measured by NDCG. In these plots, the bars associated with the “(non-) affected group” label show the NDCG@10 when *only* the relevant items from the (non-) affected group are considered as relevant. Furthermore, a lower group underestimation factor means a more severe group bias. On the left, we observe the impact on the training labels, i.e., tabular search, while the right plot shows the impact on the outputs of a general LTR model. In both plots, we observe that the affected group is hurt by the group bias, while the other group has gained. Importantly, in both regimes, the overall ranking quality is degraded by increasing the group bias.

Impact on fairness. Unlike other types of bias that may affect fairness indirectly, group bias has a direct impact on fairness: Clicks suffering from group bias can lead the system to undervalue the utility scores of a particular group (see, e.g., Fig. 1). Consequently, when the expected exposure is assigned to groups based on these biased estimates of the utility, the ranking may not be *truly* fair. For

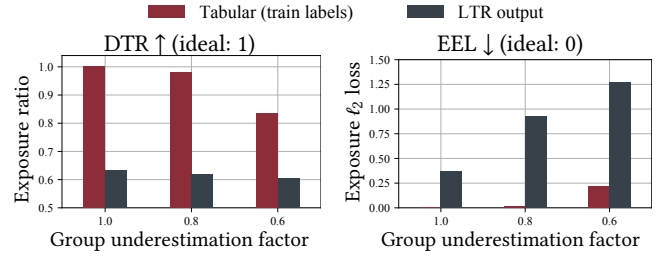


Figure 2: The impact of group bias on fairness metrics for the Yahoo! dataset.

our analyses, we consider two widely used metrics for the fairness of exposure, namely disparate treatment ratio (DTR) [43] and expected exposure loss (EEL) [4, 11]. Each metric has a definition for the *ideal expected exposure* in terms of the utility, that leads to the fairest ranking. Distinguishing between the true (unbiased) utility and observed (biased) utility, we provide formulas for the change in the true fairness metrics, when the target expected exposure is obtained from the biased utility. Fig. 2 shows an example of the impact of group bias on the DTR and EEL fairness metrics. DTR (left plot) is a multiplicative metric, so we measure the ratio between the target exposure of the affected group, to the target exposure of the non-affected group.¹ We then normalize this ratio with the ratio obtained from the full information case, i.e., using true utilities without group bias. A DTR score of 1 means the fairest exposure. EEL (right plot) is an additive metric, so we measure the ℓ_2 loss between the target exposure vector in the biased case and the full information case. For EEL, a loss of 0 means the fairest exposure. In both metrics, we observe that group bias leads to noticeable deviations from the full information case.

Correction. To correct for group bias, it should first be modeled. We follow previous work on implicit bias [23] and model group bias with a multiplicative factor. This allows us to use the inverse propensity scoring (IPS) method to correct for the bias [19, 51]. Measuring group bias, however, is not as simple as measuring position or trust bias. We argue that group bias measurement requires some assumptions on the distribution of the true utility scores of different groups. Following [8, 13, 23], one can assume that the true utility scores of both groups come from the same distribution. Naively assuming that the utility scores for each query should come from the same distribution, leads to a trivial solution with equality instead of equity. In other words, *equity* is based on the premise that exposure should be distributed based on utility, i.e., merit-based fairness. Assuming that the utility of different groups is equal for each query, means that different groups should receive equal exposure all the time, which means equality. To counter this, we propose to aggregate the utility scores of items across all the queries with similar expected group propensity and measure the group bias parameter over this aggregated set of scores. We show that our correction method based on the above amortized measurement of the bias parameter is effective for restoring both the ranking quality and fairness metrics.

Research questions. We answer the following questions:

(RQ1) What is the impact of group bias on the ranking quality and

¹We follow [43] and always keep the ratio below unity.

the true fairness metric of head and tail queries?

(RQ2) How can we effectively correct for group bias, without substituting equality for equity?

2 RELATED WORK

There is an increasing number of studies indicating the existence of group bias. Implicit bias, a special case of group bias, in which the preference of one group over the other is unintentional, has been widely studied in human behavior studies [e.g., 7, 15, 20]. More recently, implicit bias has been formalized in the set selection problem [23] and extended to the ranking scenario [8, 13].

Here, we list a small number of example studies indicating that group membership affects users' judgment. Studies by Lyness and Heilman [31] on performance evaluations and promotions of managers indicate that standards for women promotion were stricter, e.g., women had to show roughly twice as much evidence of competence as men to be seen as equally competent. In [22], it is observed in a user study that in a career search, results that are consistent with stereotypes for a career are rated higher. Sühr et al. [45] pose the important question whether "fair ranking improve[s] minority outcomes?" and arrive at the result that persistent gender preferences of employers can limit the effectiveness of fair ranking algorithms, and that fair ranking is more effective when the features of an underrepresented candidate are similar to the average overrepresented group features. Recently, Krieg et al. [25] in their user study on gender sensitive queries from [24] show that perceived gender bias affects judgment. Vlasceanu and Amodio [50] conduct two user studies and observe that societal and algorithmic gender bias affect each other: the algorithmic outputs of search engines track pre-existing societal-level gender biases; and, at the same time, exposure of users to these biased results shape users' cognitive concepts and decisions.

All of the above examples confirm that group bias exists in user interactions. In this paper, we study its impact on ranking and fairness measures and propose a method to correct for it. Closest to this paper is the work by Celis et al. [8] who show that implicit bias degrades ranking quality and that by ensuring equality of exposure, the ranking quality can be improved. What we add on top of this work is to provide a formalization of the change of ranking and merit-based fairness metrics as a result of group bias. We also provide extensive experimental analyses of the impact of group bias on the output of an LTR model.

The idea of our amortized correction to counter sparsity and equality-instead-of-equity has similarities to the notion of amortized fairness of exposure [6] where the exposures and utilities of individuals (or groups) are aggregated across multiple queries and the fairness metric is calculated according to the aggregated exposure and utility. This corresponds to fairness evaluation. In contrast, we aggregate the items associated with multiple queries to find the group bias parameter that minimizes the distance between the utility distribution of the affected and non-affected groups. This corresponds to group bias correction.

Remark 1. Our terminology of *group bias* should not be confused with the in-group bias, where a user favors members from their own group over out of the group members [34, 54]. In this study, we follow a body of previous work on implicit and explicit bias

and only focus on the group membership of the items and do not consider the group of the users. Consequently, the issues related to in-group bias, such as loyalty versus neutrality, are out of the scope of this paper.

3 GROUP MEMBERSHIP BIAS

3.1 Definitions

As discussed in Section 2, prior work shows that the judgment of a user about the relevance of an item may be affected by the item's group. Either unconsciously (as in implicit bias [13, 23]) or due to stereotypical bias [22, 25], users tend to rate one group higher than the other. In this paper, we do not aim to deal with the source of this biased behavior and only focus on its impact on algorithms and metrics. We call this behavior the *group membership bias*. Following the well-known examination hypothesis [10] that says: An item is clicked by a user if it is (i) examined; and (ii) found attractive by that user, one can attribute group bias to the attractiveness part:

$$P(A | q, d, g) = f(P(R | q, d, g), g), \quad (1)$$

where A , R , q and d stand for attractiveness, relevance, query and document, respectively, and g is the group of which d is a member. Eq. (1) states that the attraction of an item to the user not only depends on the item's true relevance to the query, but is also a function of the item's group. Following the literature on implicit bias [23], we assume this dependency to have a multiplicative form as follows:

$$P(A | q, d, g) = \beta_g \cdot P(R | q, d). \quad (2)$$

We call β_g the *group propensity*. Notice that β_g is not necessarily fixed across all queries.

Remark 2. Here we consider one sensitive attribute for simplicity of notation. Extending our discussions to more attributes with intersectional groups is possible using the formulation in [8, 33].

3.2 Ranking Regimes

Here, we distinguish between two LTR regimes: (i) tabular search for head queries; and (ii) general LTR model for tail queries. Note that the majority of previous studies focused only on the general LTR regime [e.g., 35, 44], or the tabular regime [e.g., 6, 43]. In contrast, we follow [49] and consider both LTR regimes.

Tabular search for head queries. In tabular search, users' historical interactions with the head queries are directly used to estimate items' utilities [21, 27–30, 39, 55]. In this regime, we assume that $P(A)$ can accurately be inferred from clicks: other types of bias such as position and trust bias are corrected for and only group bias remains in the signals. Our theoretical results on the impact of group bias on different metrics, lie in this regime.

General LTR model for tail queries. For new queries and ones that a tabular model is not confident about, an LTR model is used. We assume that this LTR model is trained over the accurate estimations of $P(A)$ from the head queries. Writing $r_{q,d}$ for the relevance of item d to query q , ranking metrics per query can usually be expressed in the following form:

$$\Delta_q = \sum_d \lambda_{q,d} \cdot r_{q,d}, \quad (3)$$

where λ is a metric-specific coefficient, e.g., for discounted cumulative gain (DCG) we have $\lambda_{q,d}^{DCG} = -\log(1 + \text{rank}(d))^{-1}$. Using attractiveness instead of the true relevance to train an LTR model, means that instead of Δ_q , the following metric is being optimized:

$$\hat{\Delta}_q = \sum_d \lambda_{q,d} \cdot P(A | q, d) \stackrel{(2)}{=} \sum_g \beta_g \sum_{d \in g} \lambda_{q,d} \cdot P(R | q, d). \quad (4)$$

Comparing Eq. (3) and Eq. (4), it is easy to see that $\hat{\Delta}_q$ is biased:

$$\mathbb{E}_R[\Delta_q] = \sum_d \lambda_{q,d} \cdot P(R | q, d) \neq \hat{\Delta}_q, \quad (5)$$

unless β_g is equal across all groups, i.e., there is no group bias. Similar to studies on position and trust bias [1, 19, 46–48], in our experiments, we analyze the effect of group bias on the ranking quality of the LTR model (RQ1). Due to the relationship between group bias and fairness concerns, we go one step further and assess how leaving the group bias uncorrected affects the optimization of fairness metrics.

4 THEORETICAL RESULTS

We assume that there are two groups $G_{\mathcal{A}}$ (affected) and $G_{\mathcal{N}}$ (non-affected), with group propensities $\beta_{\mathcal{A}} < 1$ and $\beta_{\mathcal{N}} = 1$. We further assume binary relevance, i.e., $r \in \{0, 1\}$, and assume that within each group, attractiveness is monotone with respect to relevance:

$$\forall d, d' \in G_i, \text{ if } r_d = 1 \text{ \& } r_{d'} = 0, \text{ then } P(A | q, d) > P(A | q, d'). \quad (6)$$

For brevity, we write a_d for the attractiveness probability of item d , assuming that there is no confusion about the query. Let the number of candidate items for a query be n , out of which $n_{\mathcal{A}}$ and $n_{\mathcal{N}}$ items belong to groups $G_{\mathcal{A}}$ and $G_{\mathcal{N}}$, respectively. We indicate the number of relevant items with $n_{\mathcal{A}}^+$ and $n_{\mathcal{N}}^+$. To assess the impact of group bias on different metrics, we measure the change in the target metric when the observable attractiveness probabilities are considered as a proxy for the true relevance scores.

4.1 Ranking Quality

For ranking quality, we calculate the NDCG of the list obtained from sorting items based on their attractiveness probability and measure its deviance from the ideal NDCG, i.e., 1. By definition, group bias affects the attractiveness probabilities for one group (here $G_{\mathcal{A}}$). Let a^* be the minimum attractiveness value for the relevant items of group $G_{\mathcal{N}}$:

$$a^* = \min_{d \in G_{\mathcal{N}}} \{a_d | r_d = 1\}. \quad (7)$$

Items of $G_{\mathcal{A}}$ with higher attractiveness values than a^* , are ranked correctly with probability 1: Group bias has dampened their attractiveness probabilities, but still none of the non-relevant items is ranked higher than them. We define an auxiliary random variable v to be the fraction of relevant items from the affected group $G_{\mathcal{A}}$ that are ranked correctly with probability 1:

$$v = \frac{|\{d | d \in G_{\mathcal{A}} \text{ \& } r_d = 1 \text{ \& } a_d > a^*\}|}{|\{d | d \in G_{\mathcal{A}} \text{ \& } r_d = 1\}|}. \quad (8)$$

For uniformly distributed scores in the interval of $[0, 1]$, the mean value of v has a closed form as follows:

$$\mathbb{E}[v] = \begin{cases} 2 - \frac{1}{\beta_{\mathcal{A}}}, & \text{if } \beta_{\mathcal{A}} > 0.5 \\ 0, & \text{otherwise.} \end{cases} \quad (9)$$

THEOREM 4.1. *In the presence of group bias, for uniformly distributed attractiveness scores, the change in the NDCG of the list, sorted based on the items attractiveness, can be approximated by a linear function of $\mathbb{E}[v]$, i.e., the fraction of affected relevant items that are still as attractive as the non-affected relevant items.*

PROOF. Our monotonicity assumption of the within-group attractiveness (Eq. (6)) ensures that no relevant item is ranked lower than non-relevant items of $G_{\mathcal{A}}$. This means that the $1 - v$ fraction of the affected relevant items lies somewhere between $n_{\mathcal{N}}^+ + vn_{\mathcal{A}}^+$ and $n_{\mathcal{N}} + n_{\mathcal{A}}^+$ positions. The expected DCG of the list would be as follows:

$$\mathbb{E}[DCG] = \sum_{i=1}^{n_{\mathcal{N}}^+ + vn_{\mathcal{A}}^+} \frac{1}{\log(1+i)} + \sum_{i=n_{\mathcal{N}}^+ + vn_{\mathcal{A}}^+ + 1}^{n_{\mathcal{N}} + n_{\mathcal{A}}^+} \frac{\xi_i}{\log(1+i)}, \quad (10)$$

where ξ_i depends on the distribution of the attractiveness scores. For a uniform distribution, we have:

$$\xi_i = \frac{(1-v)n_{\mathcal{A}}^+}{n_{\mathcal{N}} - n_{\mathcal{N}}^+ + (1-v)n_{\mathcal{A}}^+}. \quad (11)$$

Finally, using numerical analysis to approximate the average DCG in Eq. (10) by a linear function of v , leads to a small approximation error, e.g., a relative error of at most 5% in a top-20 setup. \square

4.2 Merit-Based Fairness Metrics

Next, to see the impact of group bias on fairness metrics, we analyze two well-known merit-based fairness of exposure metrics, namely EEL and DTR. For both metrics, we calculate the target exposure in two cases: the full information case where the true relevance scores are used to compute the target exposure; and, the group biased case where the attractiveness probabilities are used as proxies for relevance to compute the target exposure. By *change in true target exposure* we mean the difference between the above two cases.

4.2.1 EEL. In the next theorem, we calculate the change in the target exposure of $G_{\mathcal{N}}$ as a result of group bias.

THEOREM 4.2. *In the presence of group bias, assuming the Position-Based Model (PBM) user browsing model with logarithmic decay of exposure as in DCG,² the change in the target exposure of EEL can be approximated as follows:*

$$\Delta(EEL) = c \cdot \log\left(\frac{\# \text{ True relevant items}}{\# \text{ Perceived relevant items}}\right), \quad (12)$$

where c is a constant depending on $n_{\mathcal{N}}^+$, $n_{\mathcal{N}}$, and $n_{\mathcal{A}}^+$.

PROOF. As we are working with two groups, and the sum of the group exposures is fixed, to measure the change in the target exposure vector, it is sufficient to measure the change in the target exposure of one group and multiply it by 2.

To compute the expected exposure for EEL, the utility values

²Here we follow [12, 49] for this assumption. Similar analysis can be performed for other exposure models.

should be discrete. With a slight abuse of notation, we assume that a^* (instead of Eq. (7)) is the threshold used for discretization of the attractiveness probabilities,³ and we use \bar{a}_d for the discretized value of a_d . Since $\beta_N = 1$, we assume that $\bar{a}_d = r_d$ for $d \in G_N$. However, for the affected items, because of $\beta_{\mathcal{A}} < 1$, not all the scores are necessarily correct. We re-use v from Eq. (8) to show the fraction of affected relevant items that are still recognized as relevant.

For the average exposure of the relevant and non-relevant items we use the following two approximations:

$$\frac{1}{m} \sum_{i=1}^m \frac{1}{\log(1+i)} \approx \alpha \log(m) + c \quad (13)$$

$$\frac{1}{n-m} \sum_{i=m}^n \frac{1}{\log(1+i)} \approx \alpha' \log(m) + c', \quad (14)$$

where α and α' are constants, obtained by numerical analysis. For example, for $n = 20$, $\alpha = -0.146$ and $\alpha' = -0.022$ lead to relative approximation errors of at most 5%. In the full information case, there are a total of $n_N^+ + n_{\mathcal{A}}^+$ relevant items, i.e., $m = n_N^+ + n_{\mathcal{A}}^+$ in Eq. (13) and (14). But with group bias, only $m = n_N^+ + vn_{\mathcal{A}}^+$ of the items are recognized as relevant. Consequently, the change in the target exposure as a result of group bias can be approximated as follows:

$$\Delta(\text{EEL}) = 2(\alpha n_N^+ + \alpha'(n_N - n_N^+)) \log \left(\frac{n_N^+ + n_{\mathcal{A}}^+}{n_N^+ + vn_{\mathcal{A}}^+} \right). \quad \square$$

4.2.2 DTR. DTR is a multiplicative metric. To have a meaningful measure for the change in DTR in the presence of group bias, one has to compute the ratio of the target expected exposure in the full information (E) and group-biased (\tilde{E}) settings.

THEOREM 4.3. *In the presence of group bias, the change in the target exposure of DTR, equals the fraction of affected relevant items that are still as attractive as the non-affected relevant items.*

PROOF. Using the same notation as in the previous sections, and noting that because of the binary relevance assumption, the utility of each group is equal to the number of its relevant items, this ratio is computed as follows:

$$\rho(\text{DTR}) = \frac{\tilde{E}_{\mathcal{A}}}{\tilde{E}_N} \cdot \frac{E_N}{E_{\mathcal{A}}} = \frac{vn_N^+ + vn_{\mathcal{A}}^+}{n_N^+ + n_{\mathcal{A}}^+} = v. \quad \square$$

5 GROUP BIAS CORRECTION

Our multiplicative formulation of group bias in Eq. (2) allows us to use IPS to correct for group bias, once we know the value of the propensity β . The unbiasedness proof of IPS for this case is exactly the same as that of position bias in [19, 51]. However, similar to position bias, the unbiasedness proof depends entirely on the accurate estimation of the bias parameter [47].

Unlike position bias, group bias cannot be measured by intervening in the ranked list of items. The reason is that the bias attribute in position bias can be changed without modifying the content of the items: Each item can be shown in different positions, hence, detaching propensity from relevance. In contrast, for group bias, the bias attribute, i.e., group membership, is a characteristic of the item that *cannot* be changed. As such, users' interactions with items

cannot be measured for different values of the bias attribute.

Instead, to measure group bias, previous work on implicit bias (with the same problem formulation as Eq. (2)), assumes that the utility scores of different groups come from the same distribution [8, 13, 23]. Here, we use the same assumption, but extend it to an amortized criterion.

5.1 Measurement

Let $\mathbf{A}_{\mathcal{A}}$ and \mathbf{A}_N be the set of (observed) attractiveness scores, and $\mathbf{R}_{\mathcal{A}}$ and \mathbf{R}_N be the set of (latent) relevance scores of $G_{\mathcal{A}}$ and G_N , respectively. Let $\Delta_{\mathbb{D}}$ be a non-parametric test for the equality of one-dimensional probability distributions such as the Kolmogorov-Smirnov (KS) [32] test. The assumption that the utility scores of the two groups come from the same distribution means that:

$$\lim_{|\mathbf{R}_{\mathcal{A}}|, |\mathbf{R}_N| \rightarrow \infty} \Delta_{\mathbb{D}}(\mathbf{R}_{\mathcal{A}}, \mathbf{R}_N) = 0. \quad (15)$$

Assuming Eq. (2) to be the relation between $\mathbf{A}_{\mathcal{A}}$ and $\mathbf{R}_{\mathcal{A}}$, the best estimation of $\beta_{\mathcal{A}}$ is given by the following optimization problem:

$$\hat{\beta}_{\mathcal{A}} = \underset{\beta_{\mathcal{A}}}{\operatorname{argmin}} \Delta_{\mathbb{D}} \left(\frac{\mathbf{A}_{\mathcal{A}}}{\beta_{\mathcal{A}}}, \mathbf{A}_N \right), \quad (16)$$

where $\mathbf{A}_{\mathcal{A}}/\beta_{\mathcal{A}}$ is the set obtained by dividing all the scores in $\mathbf{A}_{\mathcal{A}}$ by $\beta_{\mathcal{A}}$. In our experiments, we choose the KS test for $\Delta_{\mathbb{D}}$ and use grid search to solve the one-dimensional optimization of Eq. (16).

It only remains to define how $\mathbf{A}_{\mathcal{A}}$ and \mathbf{A}_N sets should be constructed. Naively constructing these sets per query has two issues: (i) *Sparsity*: Usually, we do not have a large number of items with non-zero exposure, associated with one query in real-world search engines. On the other hand, statistical tests measuring the distance between probability distributions work best with large numbers of data points. This means that considering the items of one query in Eq. (16) may not lead to reliable solutions due to high variance. (ii) *Equality-instead-of-equity*: Assuming the same distribution for the utility of different groups can make the notion of equity meaningless, as the implicit assumption in merit-based fairness metrics is that different groups may not necessarily have the same utility. Correcting the utility estimations in such a way that the utility scores of different groups are forced to have close distributions makes the target exposure of different groups almost equal.

Remark 3. Our assumption that the utility scores come from the same distribution comes from the principle of maximum entropy: unless there are explicit and justified reasons indicating that different groups have different utility score distributions, it is only reasonable to assume the same distribution. Prior work on implicit bias [8, 13, 23] is based on this same assumption.

5.2 Amortized Correction

Instead of using Eq. (16) per-query, in the amortized correction method, we first aggregate the items across queries with (almost) the same group propensity. The sets $\mathbf{A}_{\mathcal{A}}$ and \mathbf{A}_N contain the attractiveness scores of these aggregated items. This aggregation addresses both issues mentioned in Section 5.1: (i) With multiple queries, the size of the sets $\mathbf{A}_{\mathcal{A}}$ and \mathbf{A}_N grows, reducing the variance. (ii) Amortized equality does not force per-query equality. As an example, assume there are two queries with the same group propensity 0.8, each with two items from different groups. The

³Usually $a^* = 0.5$ is the least controversial threshold.

relevance probabilities of the items from the affected group and non-affected group are 0.5 and 1 for the first query, and 1 and 0.5 for the second, respectively. In the per-query approach, two different propensities are inferred for the two queries to make the corrected utilities of the two groups equal in each query, leading to equality of exposure. However, in the amortized approach, we have $A_{\mathcal{A}} = \{0.4, 0.8\}$ and $A_{\mathcal{N}} = \{1, 0.5\}$. Solving Eq. (16) gives us a single value for β . In this case, groups will have different utility scores after correction, and equity of exposure has not been replaced by equality.

The amortized correction, however, introduces a new challenge: How to detect queries with almost the same group propensity, before measuring their group propensity? One way to break this cyclic dependency is by using extra knowledge. Notice that in order to detect queries with almost the same group propensity, it is only required to have a clustering of queries. Previous work shows that such a clustering exists for a number of group attributes such as gender [24]. In this paper, we assume that there exists a given clustering of queries into clusters with almost the same group propensity. After confirming the effectiveness of our amortized correction method, we further show in our experiments that even loosely clustering the queries when an accurate and more specific clustering is not available, improves the ranking quality and fairness metrics over the naive case of not correcting for group bias.

5.3 Upshot

We relied on prior studies for the existence of group bias in user interactions and provided theoretical results about its impact on the ranking and merit-based fairness metrics. Then, we proposed an amortized correction method for group bias. Next, we test our theoretical findings and arguments experimentally.

6 EXPERIMENTAL RESULTS

We investigate the following questions regarding group bias in our experiments: (i) Is the impact of group bias on degrading the ranking quality and fairness metrics consistent for different sensitive attributes and in different datasets? (ii) Can our correction method effectively correct for group bias? (iii) How does the amortized approach compare to the per-query approach for correction? (iv) How robust is our correction method to the accuracy of clustering the queries based on their group propensity?

6.1 Setup

Dataset. We use four datasets with provided sensitive attributes and two with synthesized sensitive attributes. (i) **IIT-JEE:** The dataset comprises the scores of candidates who took the Indian Institutes of Technology Joint Entrance Exam (IIT-JEE) in 2009. This information was made public in June 2009, following a Right to Information request [26]. It contains the scores of about 385k students, the student's gender (98k women and 287k men), their birth category (see [3]), and zip code. This dataset was used in prior work on implicit bias [e.g., 8]. We normalize the scores to the $[0, 1]$ interval using min-max normalization. Furthermore, we simulate queries by grouping the students based on their birth category and zip code. This gives 48.6k queries, among which we only keep the ones with both genders and at least one normalized score above 0.5 and one below 0.5. The filtering gives us 2.9k queries

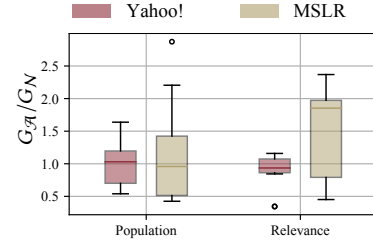


Figure 3: Ratio of affected to non-affected group members in terms of population and average utility score (relevance) for different sensitive attributes in Yahoo! and MSLR datasets.

with a total of 205k scores. (ii–iii) **TREC 2019 and 2020:** The academic search dataset provided by the TREC Fair Ranking track 2019 and 2020 [5]. These datasets come with 632 and 200 train queries, respectively, with an average of 6.7 and 23.5 documents per query. Following [42, 49], we divide the items (i.e., papers) into two groups based on their authors' h-index. (iv) **MovieLens 1M:** The classic movie recommendation dataset comprising 1M movie ratings that were provided by 6k users for 3.9k different movies. We scraped IMDB to obtain the country of origin and box office cumulative worldwide gross values for each item (i.e. movie). For the sensitive attributes, we consider two groupings as follows. In $\text{MovieLens}_{[Co.]}$, we divide the movies based on their first listed country of origin into United States (US) and non-US groups with 2.7k and 1.2k movies and 807k and 193k ratings, respectively. In $\text{MovieLens}_{[BO]}$, we divide the movies based on their box office with a threshold of 100M\$ into high and low-grossing groups with 388 and 3.5k movies and 324k and 676k ratings, respectively.

LTR dataset. To analyze the impact of group bias in the general LTR regime, following prior work on unbiased LTR research [17, 19, 47, 48], we use two well-known LTR datasets: Yahoo! Webscope [9] and MSLR-WEB30k [38]. The Yahoo! and MSLR datasets are represented by query-document feature vectors of lengths 501 and 131, respectively, and both have graded relevance labels from 0 to 4. For our experiments on head queries and a tabular regime, we use the training set of the Yahoo! and MSLR datasets, with 20k queries and 473k documents and 19k queries and 2.2M documents, respectively. The Yahoo! dataset contains 6.7k test queries and 163k test documents; MSLR contains 6k and 749k queries and documents in its test set. Test queries are considered tail queries in our experiments and we analyze the impact of group bias as well as the effectiveness of our correction method on the LTR outputs over these queries.

Sensitive attribute for LTR datasets. We extend prior work [11, 49, 53] and utilize a data-driven approach for selecting features as sensitive attributes and dividing items into two groups based on some threshold on that feature. Our criterion for selecting a feature as a sensitive attribute is as follows: For each feature we divide the items in two groups based on a threshold equal to the mean minus one standard deviation of that feature. If more than 95% of queries have at least one item from both groups, we select the feature as a candidate for sensitive attribute. Based on this criterion, we have selected features [5, 88, 100, 141, 155, 264, 393, 426] and [11, 14, 15, 126, 127, 130, 131, 132] from the Yahoo! and MSLR

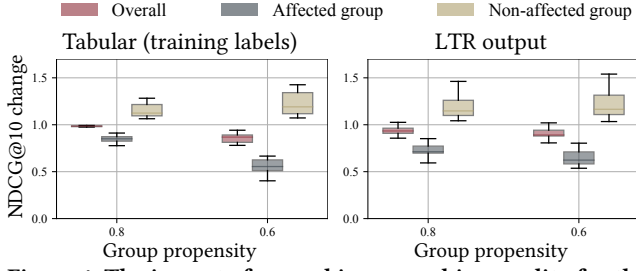


Figure 4: The impact of group bias on ranking quality for the Yahoo! and MSLR datasets with different sensitive attributes.

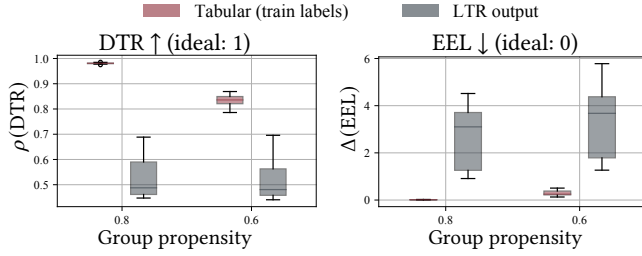


Figure 5: The impact of group bias on fairness metrics for the Yahoo! and MSLR datasets with different sensitive attributes.

datasets.⁴ Fig. 3 gives an overview of the ratio of affected to non-affected group members in terms of population and average utility score. In what follows we use, e.g., Yahoo!_[426] for the Yahoo! dataset with feature number 426 as the sensitive feature. For each feature, we assume two groupings based on two thresholds: (i) mean value; and (ii) mean minus one standard deviation. This gives us a total of 32 different setups.

Bias simulation. To simulate group bias, we use Eq. (2), but to make the simulation more realistic, we add a normal noise to the $\beta_{\mathcal{A}}$ value for each query. We experiment with two propensities $\beta_{\mathcal{A}} \in \{0.6, 0.8\}$ and use $\sigma_{\beta} = 0.1$ for the standard deviation of the normal noise. In Sec. 6.4.2, to add to the uncertainty of the setup, we also experiment with higher noise variances of $\sigma_{\beta} \in \{0.2, 0.3\}$. For our correction method, we found that adding a amount of small noise to the scores for breaking the ties, without swapping the order of the grades, helps to have a smoother curve for β in Eq. (16).

LTR model. For the general LTR model (for tail queries) we use a neural network with attention and LambdaRank Loss as in [37].

6.2 Impact of Group Bias

First, we show that group bias, on both tabular and LTR regimes, consistently has a negative impact on the ranking quality and fairness metrics. To do so, we run experiments on two datasets, namely Yahoo! and MSLR, each with 8 different features as the sensitive attribute, and two different thresholds for separating the groups (see the ‘‘Sensitive attribute’’ paragraph on Section 6.1). This gives us a total of 32 different setups. For each setup, we simulate the attractiveness probabilities with $\beta_{\mathcal{A}} \in \{0.8, 0.6\}$ ⁵ and compare NDCG@10, DTR and EEL metrics against the full information case.

Fig. 4 shows a summary of the impact of group bias on the ranking performance of both tabular and LTR regimes. These results show that the observation of Fig. 1 on one specific sensitive attribute is consistent across different datasets and other sensitive attributes: Group bias degrades the ranking quality of the affected group in the tabular regime and this damage is also reflected in the LTR output, trained over the biased training labels. As a result of pushing down the relevant members of the affected group, the non-affected group gains ranking quality, i.e., the NDCG of the non-affected group with group bias is higher than the full information case. However, the overall ranking is worsened with group bias. Comparing the tabular (left) and LTR output (right) plots in Fig. 4, we observe that increasing the severity of group bias from 0.8 to 0.6, affects the tabular regime more. This may be because unlike on the tabular regime, the impact of group bias on the LTR outputs is indirect.

Fig. 5 shows a summary of the change in fairness metrics of both tabular and LTR regimes as a result of group bias. For example, a value of $\rho(\text{DTR}) = 0.5$ in the left plot means that on average, the target (i.e., ideal) exposure computed by the biased attractiveness scores differs from the true target exposure computed in the full information case by a factor of 0.5. Similarly, a value of $\Delta(\text{EEL}) = 3$ in the right plot means that on average, the target exposure of the biased case has an ℓ_2 distance of 3 to the full information target exposure. These results show that the observation of Fig. 2 on one specific sensitive attribute is consistent across different datasets and other sensitive attributes: Group bias changes the target exposure in the tabular regime and this change is reflected in the LTR output, trained over the biased training labels. Consequently, when the system distributes the exposure according to the target exposure to make a ranking fair, if the scores are suffering from group bias, the result is not truly fair.

6.3 Amortized Correction

So far, our theoretical results in Section 4 and empirical results in Section 6.2 confirm the negative impact of group bias on ranking and fairness metrics. To correct for this bias, we have proposed an amortized correction method (Section 5). In the next set of experiments, we show the effectiveness of our proposed correction method in compensating for the negative effect of group bias.

Table 1 compares the ranking quality, in terms of NDCG@10, as well as two merit-based fairness metrics, DTR and EEL, between the biased and corrected cases in the tabular regime. In all datasets and both bias parameter values, our correction method improves the ranking quality and fairness metrics over the biased case. With some exceptions for the ranking quality with mild group bias ($\beta = 0.8$), the improvements are significant. For each bias parameter value, we have also included the estimated value obtained from Eq. (16). We observe that our estimated bias values, i.e. $\hat{\beta}_{\mathcal{A}}$, are close to their corresponding true (but unknown during the correction) values β .

We further analyze the effectiveness of our correction method in the general LTR regime. Table 2 contains the comparison of ranking quality and fairness metrics between the biased and corrected cases in our tested LTR datasets, i.e., Yahoo! and MSLR. We also report the full information case in the table. Here, we only report the results for one sensitive attribute for each dataset, noting that the results for other sensitive attributes lead to similar observations. Similar to the

⁴Feature numbers start from 1.

⁵We report results for these two values as *mild* and *severe* cases of group bias. Our experiments with other values led to consistent results.

Table 1: The impact of our amortized group bias correction on ranking and fairness metrics in the tabular regime. $\hat{\beta}_{\mathcal{A}}$ shows the estimated value of the bias parameter as in Eq. (16). For each metric, the columns “B” and “C” show the “Biased” and “Corrected” performances, respectively. Superscripts * indicate a significant improvement over the biased case with $p < 0.001$.

	$\beta = 0.8$							$\beta = 0.6$						
	$\hat{\beta}_{\mathcal{A}}$	NDCG@10 \uparrow		ρ (DTR) \uparrow		Δ (EEL) \downarrow		$\hat{\beta}_{\mathcal{A}}$	NDCG@10 \uparrow		ρ (DTR) \uparrow		Δ (EEL) \downarrow	
		B	C	B	C	B	C		B	C	B	C	B	C
Yahoo! _[426]	0.825	0.987	0.996*	0.820	0.955*	0.447	0.120*	0.626	0.885	0.988*	0.641	0.941*	1.809	0.172*
MSLR _[127]	0.843	0.975	0.991*	0.813	0.948*	1.687	0.308*	0.648	0.780	0.966*	0.627	0.926*	7.146	0.471*
IIT-JEE	0.727	0.989	0.991	0.799	0.906*	0.504	0.341*	0.547	0.970	0.985*	0.600	0.901*	1.401	0.410*
MovieLens _[Co.]	0.822	1.000	1.000	0.800	0.962*	1.101	0.513*	0.612	0.998	1.000*	0.602	0.958*	7.113	1.908*
MovieLens _[BO]	0.781	1.000	1.000	0.799	0.974*	2.330	0.895*	0.579	0.994	1.000*	0.600	0.961*	24.800	2.831*
TREC 2019	0.838	0.997	1.000	0.888	0.954*	0.041	0.020*	0.634	0.986	0.999*	0.771	0.937*	0.129	0.028*
TREC 2020	0.821	0.995	0.999	0.815	0.954*	0.356	0.114*	0.614	0.945	0.995*	0.627	0.941*	1.152	0.137*

Table 2: The impact of our amortized group bias correction on ranking and fairness metrics in general LTR regime. For each metric, the columns “B” and “C” show the “Biased” and “Corrected” performances, respectively. Superscripts * indicate a significant improvement over the biased case with $p < 0.001$.

	Full info.			$\beta = 0.8$						$\beta = 0.6$					
	NDCG	ρ (DTR)	Δ (EEL)	NDCG@10 \uparrow		ρ (DTR) \uparrow		Δ (EEL) \downarrow		NDCG@10 \uparrow		ρ (DTR) \uparrow		Δ (EEL) \downarrow	
				B	C	B	C	B	C	B	C	B	C	B	C
Yahoo! _[426]	0.649	0.477	0.673	0.615	0.645*	0.319	0.428*	1.970	0.741*	0.580	0.645*	0.313	0.456*	2.711	0.728*
MSLR _[127]	0.320	0.681	1.779	0.283	0.313*	0.675	0.684	4.380	2.016*	0.265	0.309*	0.671	0.683	5.803	2.147*

tabular regime, here we also observe performance improvements as a result of our correction method, compared to the biased case. Except for the DTR metric in MSLR, all the improvements are significant with $p < 0.001$. Compared with the full information case, we observe that in the Yahoo! dataset, our correction method leads to full recovery of NDCG@10, while in the MSLR dataset, there remains a slight gap toward the full information quality. One reason for this difference could be the distribution of relevant items in the affected and non-affected groups: In Yahoo!_[426] the ratio between the mean relevance of items in $G_{\mathcal{A}}$ to $G_{\mathcal{N}}$ is 1.05, whereas the same quantity in MSLR_[127] is 2.21. Therefore, the assumption of similar utility score distributions for both groups is closer to reality in Yahoo!_[426] than in MSLR_[127]. Similarly to NDCG, we observe that DTR and EEL are almost fully recovered from group bias in the Yahoo! dataset, whereas in the MSLR dataset, there remains a larger gap toward the full information case after correction.

Finally, Fig. 6 shows a summary of the ranking quality of biased (left) and corrected (right) utility scores in the tabular regime on all 32 setups of the LTR datasets mentioned in Sec. 6.2. In all but two cases, we observe that our correction method effectively improves the ranking quality over the biased case and achieves NDCG@10 close to 1. The two outlier cases correspond to Yahoo!_[5],⁶ where the ratio between the average utility of the affected group and the non-affected group is as low as 0.3. This is the same outlier as in Fig. 3. As our correction method is based on the same distribution assumption, this severe violation leads to inferred propensities that are noticeably lower than the actual propensity (i.e., 0.49 and 0.36 instead of 0.8 and 0.6). It is worth mentioning that in a slightly less severe violation of the same distribution assumption, i.e., MSLR_[130]

⁶For each feature, two different thresholds for separating the groups are used.

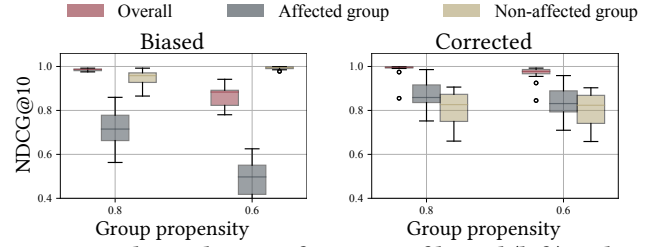


Figure 6: The ranking performance of biased (left) and corrected (right) scores for the Yahoo! and MSLR datasets with different sensitive attributes.

with a utility ratio of 0.45, our correction method is able to improve the ranking quality over the biased case. One interesting future direction would be to find out if this phenomenon, i.e., having the true average utility of the underrepresented group considerably lower than the other group, happens in real-world settings and how to correct for the bias in such cases.

6.4 Ablation Study

6.4.1 Impact of Cluster Size on Correction. In Section 5.2 we argued against measuring the group propensity for each query. Here, we analyze the impact of cluster size on the correction method. We start from the extreme case of one query per cluster and increase the cluster size until the ranking quality converges. Fig. 7 shows the ranking quality of the corrected scores as a function of the cluster size. The overall ranking quality (red line) improves as the cluster size grows and it converges to its final value at around a cluster size of 10. For the severe group bias ($\beta_{\mathcal{A}} = 0.6$), which we omit due to space restrictions, the same pattern is observed, but with a convergence

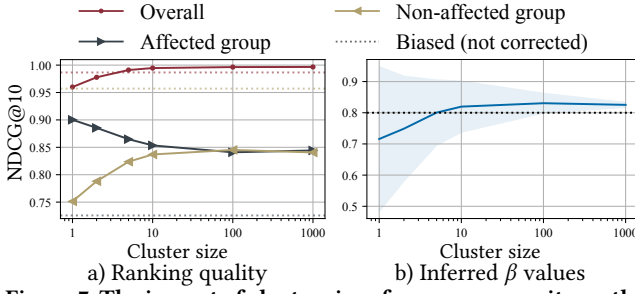


Figure 7: The impact of cluster size of group propensity on the amortized correction for group bias ($\beta_{\mathcal{A}} = 0.8$) on ranking performance for the Yahoo!_[426] dataset. Ranking quality of corrected scores (a), and accuracy of the inferred group propensity (b).

point of 100. In both cases, using a cluster size below the convergence point leads to corrected rankings that are even worse than the biased ranking. Comparing the ranking quality of the affected group (black line) with the non-affected group (golden line), we observe that smaller clusters result in over-compensation of group bias. The reason is revealed in Fig. 7(b): for smaller cluster sizes, the inferred propensity is under-estimated, leading to larger corrected scores for the affected group members. Consequently, the scores of the affected group are boosted more than they really should. One other interesting observation in Fig. 7(b) is the high variance of the inferred propensity for small clusters (issue (i) in Section 5.2).

6.4.2 Impact of Clustering Accuracy. Finally, we address the challenge of inaccurate clustering of queries based on their group propensity that we raised at the end of Section 5.2. The main goal of the following sets of experiments is to show that our correction method, even when accurate clustering of queries is not available, is still effective in improving the ranking quality over the biased case. To confirm this, we add to the uncertainty of our simulation setup in two different ways: (i) *Higher variance*: We increase the variance of the group propensity when simulating the attractiveness probabilities. We consider $\sigma_{\beta} \in \{0.2, 0.3\}$. With the increased variance, the group propensity of queries can go far from the mean value, and, as we correct the queries with a single inferred value for the propensity, the probability of a mismatch between the actual propensity and the propensity used for correction increases. (ii) *Two modes*: Instead of using a unimodal normal distribution to simulate group propensity, we use a mixture model with two modes $\{0.6, 0.8\}$. This means that for half of the queries, the group propensity follows a normal distribution with a mean of 0.6 while for the other half, the normal distribution has a mean of 0.8 and during inference, we are not given the information about which query belongs to which mode.

Fig. 8 shows the ranking quality of the corrected scores with respect to different cluster sizes in the increased uncertainty setups described above. In both plots, we observe that increasing the variance of the simulated group propensity both increases the negative impact of group bias on ranking (dotted lines) and makes it harder to correct for the bias (solid lines). The important result of these experiments, however, is that even though the uncertainty about group propensity is high, our amortized correction method almost always improves the ranking quality over the biased case. Note

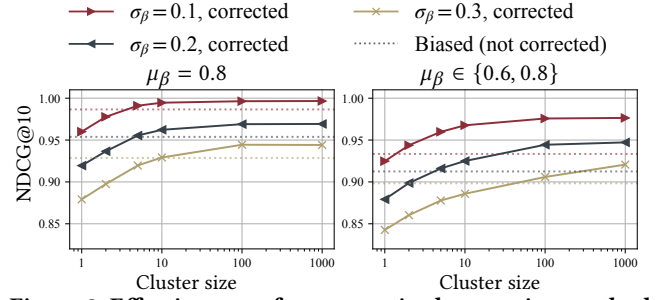


Figure 8: Effectiveness of our amortized correction method when accurate clustering based on group propensity is not available. Yahoo!_[426] dataset.

that in all setups, per-query correction as well as clusters with a small size lead to worse ranking qualities than the biased scores. Interestingly, when there are two modes of group propensity (right plot), our correction method, oblivious to the mode membership and assuming a fixed propensity, is able to correct the scores and achieve a ranking performance higher than the biased case.

7 CONCLUSION AND FUTURE WORK

In this paper, we have addressed group membership bias, which is based on the observation that a user’s perception of an item’s group membership may affect their judgment about the utility of an item. We have provided extensive theoretical and empirical analyses of the impact of group bias on the ranking quality and two fairness of exposure metrics, DTR and EEL. By utilizing an auxiliary variable v as the fraction of affected relevant items that are still as attractive as the non-affected relevant items, we have shown that, in the presence of group bias, NDCG and DTR change linearly with v , while the change in EEL has a more complex form in terms of v .

Correcting for group bias, which is a type of *content-based* bias, is not as easy as *context-based* types of bias such as position and trust bias. To measure group bias, assumptions based on fairness constraints should be made about the utility distribution of different groups. However, such assumptions can potentially make the equity-based notion of fairness meaningless. Amortized correction for the group bias is our solution to this issue, as global equality does not contradict local equity. We have experimentally confirmed that our correction method, when its assumptions are met, is able to fully recover the scores suffering from group bias, in the sense that the ranking and fairness metrics after correction achieve the values of the full information case.

Our amortized correction, however, raises a challenge of its own, as it is not easy to cluster queries with almost the same group propensity without the knowledge of group propensity. Our experiments have shown that even when an accurate clustering of queries is not available, loosely clustering the queries for the amortized correction still leads to better rankings compared to the biased scores. More interestingly, per-query correction as well as clusters of small size lead to worse ranking qualities than the biased case.

There are several future directions to this study. Here, we analyzed a multiplicative model of group bias, and our theoretical and empirical results are based on this formulation. One way to extend our results is to consider more complex models for group bias. Another possible future direction is to propose measurement

and correction methods that perform better with increased uncertainty of group propensity. Moreover, as group bias is based on users' perception of group membership, it can change over time. Analyzing group bias in a dynamic setting is therefore another interesting future direction. This study deals with the impact of group bias on fair exposure and, hence, we only consider the so-called treatment-based fairness metrics. In contrast, some studies focus on impact-based fairness [41], where the objective is to make sure that items receive a fair amount of impact, e.g., clicks. While our work suggests a way to correct for group bias in the historical clicks in order to make the exposure in future rankings fair, a next direction would be to account for group bias when optimizing for impact-based fairness.

CODE AND DATA

To ensure the reproducibility of the reported results, this work only made use of publicly available data and our experimental implementation can be accessed publicly at <https://github.com/AliVard/groupbias>.

ACKNOWLEDGMENTS

This research was supported by Elsevier and the Netherlands Organisation for Scientific Research (NWO) under project nr 612.-001.551, and by the Hybrid Intelligence Center, a 10-year program funded by the Dutch Ministry of Education, Culture and Science through the Netherlands Organisation for Scientific Research, <https://hybrid-intelligence-centre.nl>.

All content represents the opinion of the authors, which is not necessarily shared or endorsed by their respective employers and/or sponsors.

REFERENCES

- [1] Aman Agarwal, Xuanhui Wang, Cheng Li, Michael Bendersky, and Marc Najork. 2019. Addressing Trust Bias for Unbiased Learning-to-Rank. In *The World Wide Web Conference*. ACM, 4–14.
- [2] Qingyao Ai, Keping Bi, Cheng Luo, Jiafeng Guo, and W Bruce Croft. 2018. Unbiased Learning to Rank with Unbiased Propensity Estimation. In *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval*. ACM, 385–394.
- [3] Surender Baswana, Partha Pratim Chakrabarti, Sharat Chandran, Yashodhan Kanoria, and Utkarsh Patange. 2019. Centralized Admissions for Engineering Colleges in India. In *Proceedings of the 2019 ACM Conference on Economics and Computation*. 323–324.
- [4] Asia J. Biega, Fernando Diaz, Michael D. Ekstrand, Sergey Feldman, and Sebastian Kohlmeier. 2021. Overview of the TREC 2020 Fair Ranking Track. In *The Twenty-Ninth Text Retrieval Conference Proceedings (TREC 2020)*.
- [5] Asia J. Biega, Fernando Diaz, Michael D. Ekstrand, and Sebastian Kohlmeier. 2019. Overview of the TREC 2019 Fair Ranking Track. In *The Twenty-Eighth Text Retrieval Conference (TREC 2019) Proceedings*.
- [6] Asia J. Biega, Krishna P. Gummadi, and Gerhard Weikum. 2018. Equity of Attention: Amortizing Individual Fairness in Rankings. In *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval (SIGIR '18)*. Association for Computing Machinery, New York, NY, USA, 405–414. <https://doi.org/10.1145/3209978.3210063>
- [7] Michael Brownstein. 2017. Implicit Bias. In *Stanford Encyclopedia of Philosophy*, Edward Zalta (Ed.).
- [8] L. Elisa Celis, Anay Mehrotra, and Nisheeth K. Vishnoi. 2020. Interventions for Ranking in the Presence of Implicit Bias. In *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency (FAT* '20)*. Association for Computing Machinery, New York, NY, USA, 369–380. <https://doi.org/10.1145/3351095.3372858>
- [9] Olivier Chapelle and Yi Chang. 2011. Yahoo! Learning to Rank Challenge Overview. In *Proceedings of the Learning to Rank Challenge (Proceedings of Machine Learning Research)*, Vol. 14. PMLR, 1–24. <https://proceedings.mlr.press/v14/chapelle11a.html>
- [10] Aleksandr Chuklin, Ilya Markov, and Maarten de Rijke. 2015. *Click Models for Web Search*. Morgan & Claypool Publishers.
- [11] Fernando Diaz, Bhaskar Mitra, Michael D. Ekstrand, Asia J. Biega, and Ben Carterette. 2020. Evaluating Stochastic Rankings with Expected Exposure. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management (CIKM '20)*. Association for Computing Machinery, New York, NY, USA, 275–284. <https://doi.org/10.1145/3340531.3411962>
- [12] Michael D. Ekstrand, Graham McDonald, Amifa Raj, and Isaac Johnson. 2022. Overview of the TREC 2021 Fair Ranking Track. In *The Thirtieth Text Retrieval Conference (TREC 2021) Proceedings*.
- [13] Vitalii Emelianov, Nicolas Gast, Krishna P. Gummadi, and Patrick Loiseau. 2020. On Fair Selection in the Presence of Implicit Variance. In *Proceedings of the 21st ACM Conference on Economics and Computation (EC '20)*. Association for Computing Machinery, New York, NY, USA, 649–675. <https://doi.org/10.1145/3391403.3399482>
- [14] Alessandro Fabris, Alberto Purpura, Gianmaria Silvello, and Gian Antonio Susto. 2020. Gender Stereotype Reinforcement: Measuring the Gender Bias Conveyed by Ranking Algorithms. *Information Processing & Management* 57, 6 (2020), 102377.
- [15] Chloé FitzGerald and Samia Hurst. 2017. Implicit Bias in Healthcare Professionals: A Systematic Review. *BMC medical ethics* 18, 1 (2017), 1–18. <https://bmcomedethics.biomedcentral.com/articles/10.1186/s12910-017-0179-8>
- [16] Sara Hajian, Francesco Bonchi, and Carlos Castillo. 2016. Algorithmic Bias: From Discrimination Discovery to Fairness-Aware Data Mining. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '16)*. Association for Computing Machinery, New York, NY, USA, 2125–2126. <https://doi.org/10.1145/2939672.2945386>
- [17] Rolf Jagerman, Harrie Oosterhuis, and Maarten de Rijke. 2019. To Model or to Intervene: A Comparison of Counterfactual and Online Learning to Rank from User Interactions. In *Proceedings of the 42nd International ACM SIGIR Conference on Research & Development in Information Retrieval*. ACM, 15–24.
- [18] Thorsten Joachims, Laura Granka, Bing Pan, Helene Hembrooke, and Geri Gay. 2005. Accurately Interpreting Clickthrough Data as Implicit Feedback. In *Proceedings of the 28th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM, 154–161.
- [19] Thorsten Joachims, Adith Swaminathan, and Tobias Schnabel. 2017. Unbiased Learning-to-Rank with Biased Feedback. In *Proceedings of the Tenth ACM International Conference on Web Search and Data Mining*. ACM, 781–789.
- [20] Christine Jolls and Cass R Sunstein. 2006. The Law of Implicit Bias. *Calif. L. Rev.* 94 (2006), 969.
- [21] Sumeet Katariya, Branislav Kveton, Csaba Szepesvari, and Zheng Wen. 2016. DCM Bandits: Learning to Rank with Multiple Clicks. In *International Conference on Machine Learning*. 1215–1224.
- [22] Matthew Kay, Cynthia Matuszek, and Sean A. Munson. 2015. Unequal Representation and Gender Stereotypes in Image Search Results for Occupations. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems (CHI '15)*. Association for Computing Machinery, New York, NY, USA, 3819–3828. <https://doi.org/10.1145/2702123.2702520>
- [23] Jon Kleinberg and Manish Raghavan. 2018. Selection Problems in the Presence of Implicit Bias. In *9th Innovations in Theoretical Computer Science Conference (ITCS 2018)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik.
- [24] Klara Krieg, Emilia Parada-Cabaleiro, Gertraud Medicus, Oleg Lesota, Markus Schedl, and Navid Rekasaz. 2022. Grep-BiasIR: A Dataset for Investigating Gender Representation-Bias in Information Retrieval Results. *arXiv preprint arXiv:2201.07754* (2022).
- [25] Klara Krieg, Emilia Parada-Cabaleiro, Markus Schedl, and Navid Rekasaz. 2022. Do Perceived Gender Biases in Retrieval Results Affect Relevance Judgements? *arXiv preprint arXiv:2203.01731* (2022).
- [26] Mr. Rajeev Kumar. 2009. Rti complaint. Decision No. CIC/SG/C/2009/001088/5392, Complaint No. CIC/SG/C/2009/001088.
- [27] Branislav Kveton, Csaba Szepesvari, Zheng Wen, and Azin Ashkan. 2015. Cascading Bandits: Learning to Rank in the Cascade Model. In *International Conference on Machine Learning*. 767–776.
- [28] Paul Lagrée, Claire Vernade, and Olivier Cappé. 2016. Multiple-play Bandits in the Position-based Model. In *Advances in Neural Information Processing Systems*. 1597–1605.
- [29] Tor Lattimore and Csaba Szepesvári. 2020. *Bandit Algorithms*. Cambridge University Press.
- [30] Chang Li, Branislav Kveton, Tor Lattimore, Ilya Markov, Maarten de Rijke, Csaba Szepesvári, and Masrour Zoghi. 2020. BubbleRank: Safe Online Learning to Rank via Implicit Click Feedback. In *Uncertainty in Artificial Intelligence*. PMLR, 196–206.
- [31] Karen S. Lyness and Madeline E. Heilman. 2006. When Fit is Fundamental: Performance Evaluations and Promotions of Upper-level Female and Male Managers. *Journal of Applied Psychology* 91, 4 (2006), 777. <https://doi.org/10.1037/0021-9010.91.4.777>
- [32] Frank J Massey Jr. 1951. The Kolmogorov-Smirnov Test for Goodness of Fit. *J. Amer. Statist. Assoc.* 46, 253 (1951), 68–78.
- [33] Anay Mehrotra, Bary S. R. Pradelski, and Nisheeth K. Vishnoi. 2022. Selection in the Presence of Implicit Bias: The Advantage of Intersectional Constraints. In *2022 ACM Conference on Fairness, Accountability, and Transparency (FACCT '22)*. Association for Computing Machinery, New York, NY, USA, 599–609. <https://doi.org/10.1145/3531146.3533124>
- [34] Pascal Molenberghs. 2013. The Neuroscience of In-group Bias. *Neuroscience & Biobehavioral Reviews* 37, 8 (2013), 1530–1536. <https://doi.org/10.1016/j.neubiorev.2013.06.002>
- [35] Marco Morik, Ashudeep Singh, Jessica Hong, and Thorsten Joachims. 2020. Controlling Fairness and Bias in Dynamic Learning-to-Rank. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '20)*. Association for Computing Machinery, New York, NY, USA, 429–438. <https://doi.org/10.1145/3397271.3401100>
- [36] Harrie Oosterhuis and Maarten de Rijke. 2021. Robust Generalization and Safe Query-Specialization in Counterfactual Learning to Rank. In *Proceedings of the Web Conference 2021 (WWW '21)*. Association for Computing Machinery, New York, NY, USA, 158–170. <https://doi.org/10.1145/3442381.3450018>
- [37] Przemyslaw Pobrotyn, Tomasz Bartczak, Mikołaj Synowiec, Radosław Białobrzęski, and Jarosław Bojar. 2020. Context-Aware Learning to Rank with Self-Attention. *arXiv preprint arXiv:2005.10084* (2020).
- [38] Tao Qin and Tie-Yan Liu. 2013. Introducing LETOR 4.0 Datasets. *arXiv preprint arXiv:1306.2597* (2013).
- [39] Filip Radlinski, Robert Kleinberg, and Thorsten Joachims. 2008. Learning Diverse Rankings with Multi-armed Bandits. In *Proceedings of the 25th International Conference on Machine Learning*. 784–791.
- [40] Amifa Raj and Michael D. Ekstrand. 2022. Measuring Fairness in Ranked Results: An Analytical and Empirical Comparison. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*. Association for Computing Machinery, New York, NY, USA, 726–736. <https://doi.org/10.1145/3477495.3532018>
- [41] Yuta Saito and Thorsten Joachims. 2022. Fair Ranking as Fair Division: Impact-Based Individual Fairness in Ranking. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '22)*. Association for Computing Machinery, New York, NY, USA, 1514–1524. <https://doi.org/10.1145/3534678.3539353>
- [42] Fatemeh Sarvi, Maria Heuss, Mohammad Aliannejadi, Sebastian Schelter, and Maarten de Rijke. 2021. Understanding and Mitigating the Effect of Outliers in Fair Ranking. *arXiv preprint arXiv:2112.11251* (2021).
- [43] Ashudeep Singh and Thorsten Joachims. 2018. Fairness of Exposure in Rankings. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD '18)*. Association for Computing Machinery, New York, NY, USA, 2219–2228. <https://doi.org/10.1145/3219819.3220088>
- [44] Ashudeep Singh and Thorsten Joachims. 2019. Policy Learning for Fairness in Ranking. In *Advances in Neural Information Processing Systems*, H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett (Eds.), Vol. 32.

- Curran Associates, Inc. https://proceedings.neurips.cc/paper_files/paper/2019/file/9e82757e9a1c12cb710ad680db11f6f1-Paper.pdf
- [45] Tom Sühr, Sophie Hilgard, and Himabindu Lakkaraju. 2021. Does Fair Ranking Improve Minority Outcomes? Understanding the Interplay of Human and Algorithmic Biases in Online Hiring (AIES '21). Association for Computing Machinery, New York, NY, USA, 989–999. <https://doi.org/10.1145/3461702.3462602>
- [46] Ali Vardasbi, Maarten de Rijke, and Ilya Markov. 2020. Cascade Model-Based Propensity Estimation for Counterfactual Learning to Rank. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '20)*. Association for Computing Machinery, New York, NY, USA, 2089–2092. <https://doi.org/10.1145/3397271.3401299>
- [47] Ali Vardasbi, Maarten de Rijke, and Ilya Markov. 2021. Mixture-Based Correction for Position and Trust Bias in Counterfactual Learning to Rank. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management (CIKM '21)*. Association for Computing Machinery, New York, NY, USA, 1869–1878. <https://doi.org/10.1145/3459637.3482275>
- [48] Ali Vardasbi, Harrie Oosterhuis, and Maarten de Rijke. 2020. When Inverse Propensity Scoring Does Not Work: Affine Corrections for Unbiased Learning to Rank. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management (CIKM '20)*. Association for Computing Machinery, New York, NY, USA, 1475–1484. <https://doi.org/10.1145/3340531.3412031>
- [49] Ali Vardasbi, Fatemeh Sarvi, and Maarten de Rijke. 2022. Probabilistic Permutation Graph Search: Black-Box Optimization for Fairness in Ranking. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*. Association for Computing Machinery, New York, NY, USA, 715–725. <https://doi.org/10.1145/3477495.3532045>
- [50] Madalina Vlasceanu and David M. Amodio. 2022. Propagation of Societal Gender Inequality by Internet Search Algorithms. *Proceedings of the National Academy of Sciences* 119, 29 (2022), e2204529119. <https://doi.org/10.1073/pnas.2204529119> arXiv:<https://www.pnas.org/doi/pdf/10.1073/pnas.2204529119>
- [51] Xuanhui Wang, Nadav Golbandi, Michael Bendersky, Donald Metzler, and Marc Najork. 2018. Position Bias Estimation for Unbiased Learning to Rank in Personal Search. In *Proceedings of the Eleventh ACM International Conference on Web Search and Data Mining*. ACM, 610–618.
- [52] Haolun Wu, Bhaskar Mitra, Chen Ma, Fernando Diaz, and Xue Liu. 2022. Joint Multisided Exposure Fairness for Recommendation. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*. Association for Computing Machinery, New York, NY, USA, 703–714. <https://doi.org/10.1145/3477495.3532007>
- [53] Himank Yadav, Zhengxiao Du, and Thorsten Joachims. 2021. Policy-Gradient Training of Fair and Unbiased Ranking Functions. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. Association for Computing Machinery, New York, NY, USA, 1044–1053. <https://doi.org/10.1145/3404835.3462953>
- [54] Bozena Zdaniuk and John M. Levine. 2001. Group Loyalty: Impact of Members' Identification and Contributions. *Journal of Experimental Social Psychology* 37, 6 (2001), 502–509. <https://doi.org/10.1006/jesp.2000.1474>
- [55] Masrour Zoghi, Tomás Tunys, Lihong Li, Damien Jose, Junyan Chen, Chun Ming Chin, and Maarten de Rijke. 2016. Click-based Hot Fixes for Underperforming Torso Queries. In *Proceedings of the 39th International ACM SIGIR conference on Research and Development in Information Retrieval*. 195–204.